

Welcome to our newest interactive and digitally optimized tire range!

MIZED


Skip instructions

Tap or click here for more





On the CONTENT page, simply click on the desired product segment to view the entire portfolio and deep dive into product details.

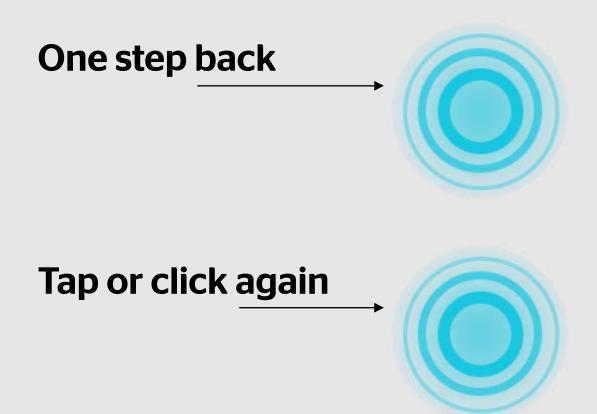

Leads to chapter MTB

Leads to chapter ROAD


> Leads to chapter GRAVEL

-> TUBES and so on...





For example, in the ROAD chapter you can go directly to each individual tire, to our website or directly back to CONTENT.

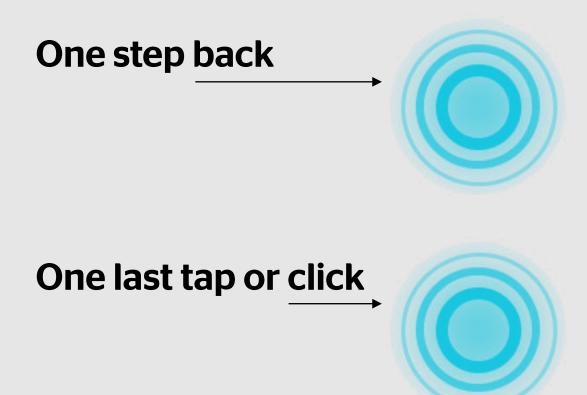

Grand Prix TR

Grand Prix

AERO 111

Grand Prix 5000 ASTR

Grand Prix 5000 S TR

Grand Prix 5000 TT TR

Go to a specific tire model

Grand Prix 4-5

Ultra Sport III

Gator Har

Gatorskin

Grand Sport

Hometrainer

Leads directly to ROAD on our website

N

Go back to CONTENT

LCL LCL

UAE

DITT





Go back to ROAD

And each product overview, click on the left icons to expand for further product details.

That's all you need to know. So feel free to have a look around and have fun!

Tap or click to start



Go back to CONTENT









Grand Prix TR

Grand Prix

AERO 111

Grand Prix 5000 AS TR

Grand Prix 5000 S TR

Grand Prix 5000 TT TR

Grand Prix 5000

Grand Prix 4-Season

Ultra Sport III

Gator Hardshell

Gatorskin

Grand Sport Race

Hometrainer II



W. M. M. M. M.



Grand Prix TR



TECHNOLOGY



SIZES







Grand Prix TR

Г	٦
н	 I
н	 I
н	
н	
L	

TECHNOLOGY

Г		
L		
L	++++-	
L		
L		

SIZES



FEATURES

FOR EVERY RIDE

The perfect option for those looking for a great value tire that is tubeless-ready. It comes with BlackChili Compound and has an all-new 4-ply construction, that perfectly balances puncture protection and rolling resistance. Whether training, commuting or going the distance - the Grand Prix TR has you covered.




With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.



All **Tubeless Ready** tires have been designed with versatility in mind. It's your choice: set up tubeless using Sealant or use an innertube.



The robust **4-ply construction** balances rolling resistance, low weight and puncture resistance.





Grand Prix TR

Е	
L.	
L.	
	 _


TECHNOLOGY



SIZES



FEATURES



Grand Prix TR

ArticleETRTODimensionColor/sidewallg $max.PSIEAN$ R015072825-622 $28^{\circ}1700 \times 25C$ \bigcirc foldable 310 108 4019238097955 $60100000000000000000000000000000000000$	BlackChili
0150729 25-622 28" 700 x 25C Image: foldable 280* 108 4 019238 097931 6 0150731 28-622 28" 700 x 28C Image: foldable 340 94 4 019238 098068 6 0150732 28-622 28" 700 x 28C Image: foldable 360 94 4 019238 098082 6	Article
0150731 28-622 28" 700 x 28C Image: foldable 340 94 4 019238 098068 6 0150732 28-622 28" 700 x 28C Image: foldable 360 94 4 019238 098082 6	0150728
0150732 28-622 28" 700 x 28C foldable 360 94 4 019238 098082 6	0150729
	0150731
0150733 30-622 28" 700 x 30C foldable 370 72 4 019238 098105 6	0150732
	0150733
0150734 30-622 28" 700 x 30C foldable 395* 72 4 019238 098129 6	0150734
0150735 32-622 28" 700 x 32C foldable 445 72 4 019238 098143 6	0150735
0150736 32-622 28" 700 x 32C foldable 405* 72 4 019238 098167 6	0150736





Selected sizes also available as tube-type tire. *Preliminary estimation


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Grand Prix TR

	L
	L
	L
	L
	L
	L
	L

TECHNOLOGY



SIZES



FEATURES





Tread pattern inspired by iconic Lazer Grip



Puncture resistant with new 4-ply construction




Grand Prix

TECHNOLOGY



SIZES





Grand Prix

—	

TECHNOLOGY



SIZES

FOR EVERY RIDE

The Grand Prix inherits technology and learnings from the iconic Grand Prix 5000 range. It comes with BlackChili Compound and has a 3-ply construction, that offers good puncture protection and rolling resistance. Whether training, commuting or going the distance – the Grand Prix has you covered.



With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

ROAD

<

	1

TECHNOLOGY

Grand	Prix	


BlackChili Compound - 3/180 TPI - Tube

Article	ETRTO	Dimension	Color/sidewall	g	max.	PSIEAN	RRP/€
0150737	28-622	28" 700 x 28C	foldable	290	94	4 019238 326970	45,95
0150738	28-622	28" 700 x 28C	foldable	300	94	4 019238 326963	45,95
0150739	30-622	28" 700 x 30C	foldable	330	72	4 019238 326956	45,95
0150740	30-622	28" 700 x 30C	foldable	370	72	4 019238 326949	45,95





SIZES



AERO 111



TECHNOLOGY



SIZES







AERO 111

Г	٦
L	
L	
L	
L	
L	

TECHNOLOGY



SIZES



FEATURES

A PERFECTED STORM

Extensively tested in the wind tunnel, the AERO 111 represents the ultimate aerodynamic tire without compromise. To save every watt we created the unique tread pattern together with the experts at Swiss Side.



BlackChili compound is renowned for its perfect balance of grip and low rolling resistance. For AERO 111 we use a race-optimized BlackChili, offering low rolling resistance in combination with excellent grip in wet and dry conditions.


The combination of all these features means on top of the low aerodynamic drag, the AERO 111 offers low rolling resistance, good puncture resistance and exceptional grip in both wet and dry conditions.



Vectran, our patented technology from the GP5000 family. Selected for AERO 111 because of its unparalleled level of protection from sharp foreign objects, whilst not affecting rolling resistance.

DT SWISS

Swiss Side are the industry leader in aerodynamics. With over 20 years of experience in both Formula 1 and cycling, they are renowned for utilising the latest technologies and methodologies in computational aerodynamics and real-world testing.



AERO 111

E	


TECHNOLOGY







FEATURES



AERO 11	1						
BlackChili	Compound	d - Vectran Breaker	- ACT - 2/220 TPI				TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0102046	26-622	28" 700 x 26C	foldable	250	101	4 019238 283921	122,95
0102047	29-622	28" 700 x 29C	foldable	280	101	4 019238 283907	122,95














KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





AERO 111

ROAD

<

TECHNOLOGY



SIZES



DT SWISS

The aero-optimized tread pattern certainly looks different: 48 little cavities are regularly distributed over its surface. These so-called **'vortex generators'** are the very feature that manage to control the turbulence in the airflow on the surface of the front wheel. Ultimately, this results in a perfected storm that allows for the reduction of drag of the entire wheel tire system.



antinental's MEA

All **Tubeless Ready** tires have been designed with versatility in mind. It's your choice: set up tubeless using Conti RevoSealant or use an innertube.




AERO 111



TECHNOLOGY




SIZES

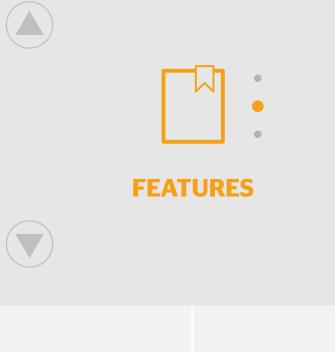

7

Without AERO 111

The rider benefits less from the sailing effect because the early airflow separation increases the turbulent air flow. Thus, increasing aerodynamic drag of the wheel-tire system.

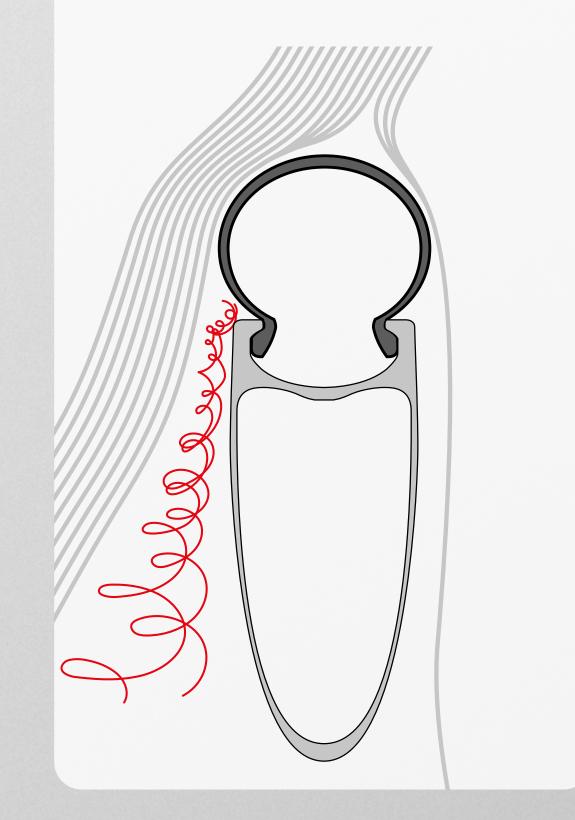



<



With AERO 111

The sailing effect (forward acting force) increases. Even with lower rim profiles the rider benefits from this effect because the laminar airflow stays adjacent to the rim for a longer time. Thus, decreasing aerodynamic drag of the wheel-tire system at all speeds.

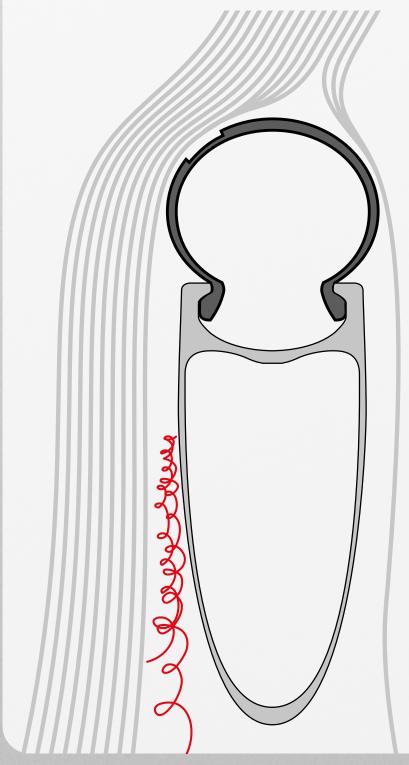



AERO 111




TECHNOLOGY



SIZES



 \square

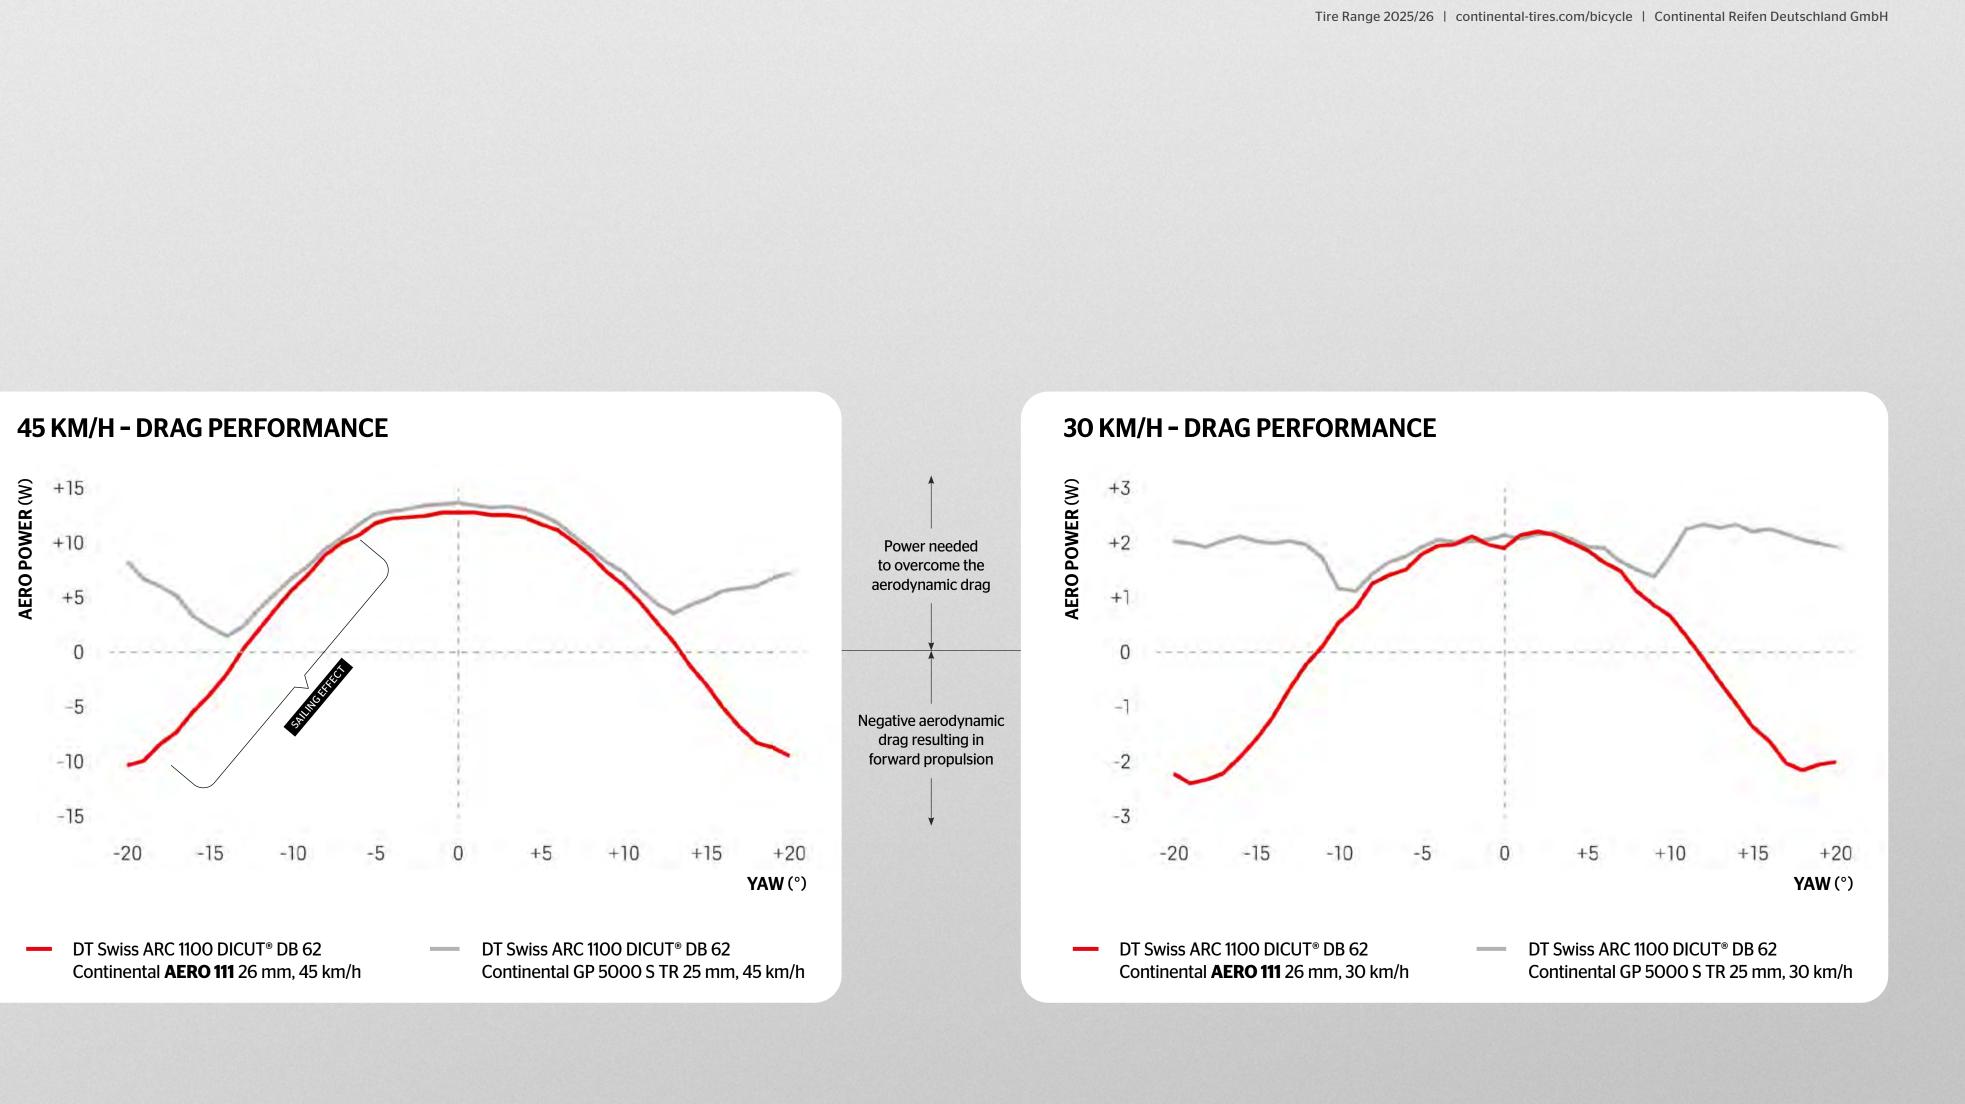

Grand Prix 5000 AS TR



TECHNOLOGY



SIZES







ROAD

<

Grand Prix 5000 AS TR

L	 •
L	
L	


TECHNOLOGY

++++

SIZES



FEATURES



FOR THE EXTRA MILE

The strongest Grand Prix 5000: creates trust in all weather conditions and boosts your protection.



With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.



The revolutionary approach in cycling. Embedded in the tire construction the Active Comfort Technology absorbs vibrations and smoothens your ride.




Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.



Lazer Grip, to make you one with the road. The lazered micro profile structure expands over the tire's shoulder and provides outstanding cornering.





Grand Prix 5000 AS TR


TECHNOLOGY



SIZES



FEATURES



Grand P	◢ ◢ ◗` ᡦ ▃▖ <u>\</u> ⋓ ↓ ⋓	

Grand P	Prix 500	O AS TR					
BlackChili	Compoun	d - Vectran Breaker	- LazerGrip - ACT -	2/220 1	[P]		TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101910	25-622	700 x 25C	foldable refl.	295	108	4 019238 056754	107,95
0101901	25-622	700 x 25C	foldable	305	108	4 019238 056716	102,95
0101911	28-622	700 x 28C	foldable refl.	325	94	4 019238 056815	107,95
0101902	28-622	700 x 28C	foldable	340	94	4 019238 056792	102,95
0101912	32-622	700 x 32C	foldable refl.	385	72	4 019238 056914	107,95
0101903	32-622	700 x 32C	foldable	395	72	4 019238 056884	102,95
0101913	35-622	700 x 35C	foldable refl.	430	65	4 019238 056990	107,95
0101904	35-622	700 x 35C	foldable	440	65	4 019238 056952	102,95









Tire Range 2025/26 contir	nental-tires.com/bicycle	Continental Reifer	n Deutschland GmbH
-----------------------------	--------------------------	---------------------------	--------------------


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Grand Prix 5000 AS TR



TECHNOLOGY



SIZES



FEATURES



More wet grip



More mileage



Grand Prix 5000 S TR



TECHNOLOGY



SIZES







Grand Prix 5000 S TR

	_
	•
	•
	•

FECU	Incv
ГЕСП	LOGY

L	
L	+++-
	+++-
L	

SIZES



FEATURES



THE NEW ERA IN CYCLING

The proven Grand Prix 5000 S Tubeless Ready: Lighter, faster and with stronger sidewalls. The new standard in road tubeless ready technology. Ride faster, more comfortable and with increased puncture protection. Made to make you better.



With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.



The revolutionary approach in cycling. Embedded in the tire construction the Active Comfort Technology absorbs vibrations and smoothens your ride.

<




Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.



Lazer Grip, to make you one with the road. The lazered micro profile structure expands over the tire's shoulder and provides outstanding cornering.





Grand Prix 5000 S TR

Г	1
	 L
	 I
	 I
	 I
	 L
	 J

TECHNOLOGY



SIZES



FEATURES

Grand	Prix 50	000S	TR

Grand Prix 5000 S TR								
	BlackChili Compound - Vectran Breaker - LazerGrip - ACT - 2/220 TPI							
	Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
	0101934	30-584	27.5" 650 x 30B	foldable	285	72	4 019238 063691	89,95
	0101935	32-584	27.5" 650 x 32B	foldable	305	72	4 019238 063684	89,95
	0101866	25-622	28" 700 x 25C	foldable	250	108	4 019238 054439	89,95
	0101873	25-622	28" 700 x 25C	foldable	255	108	4 019238 055559	89,95
	0101867	28-622	28" 700 x 28C	foldable	280	94	4 019238 054422	89,95
	0101874	28-622	28" 700 x 28C	foldable	280	94	4 019238 055580	89,95
	0101868	30-622	28" 700 x 30C	foldable	300	72	4 019238 054415	89,95
	0101875	30-622	28" 700 x 30C	foldable	305	72	4 019238 055610	89,95
	0101869	32-622	28" 700 x 32C	foldable	325	72	4 019238 054408	89,95
	0101876	32-622	28" 700 x 32C	foldable	330	72	4 019238 055641	89,95







Tire Range 2025/26	continental-tires.com/bicycle	Continental Reifen Deutschland GmbH
--------------------	-------------------------------	-------------------------------------




KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Grand Prix 5000 S TR




TECHNOLOGY



SIZES





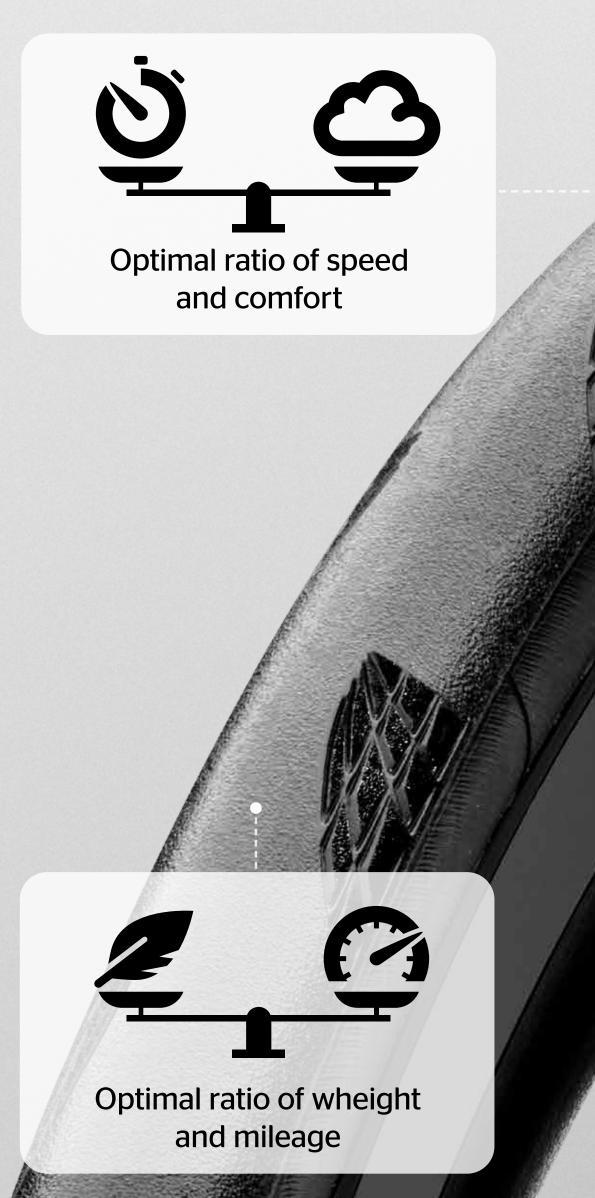



Grand Prix 5000 TT TR



TECHNOLOGY



SIZES







ROAD

<

Grand Prix 5000 TT TR

TECHNOLOGY

SIZES



FEATURES



SPECIALIST TIRE FOR RACES AGAINST THE CLOCK

of speed, be it in a criterium, time trial or triathlon.



With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.



The revolutionary approach in cycling. Embedded in the tire construction the Active Comfort Technology absorbs vibrations and smoothens your ride.

The fastest Grand Prix 5000 tubeless tire for the pursuit




Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.



Lazer Grip, to make you one with the road. The lazered micro profile structure expands over the tire's shoulder and provides outstanding cornering.





Grand Prix 5000 TT TR

Г	
	 - 1

TECHNOLOGY



SIZES



FEATURES



Grand Prix 5000 TT TR						_	
BlackChili	Compound	d - Vectran Break	er - LazerGrip - ACT -	2/220 1	PI		TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101893	25-622	700 x 25C	foldable	220	108	4 019238 056266	111,95
0101894	28-622	700 x 28C	foldable	245	94	4 019238 056273	111,95












KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Grand Prix 5000 TT TR



TECHNOLOGY



SIZES



FEATURES

 \square



Maximum speed



Vectran Puncture Protection



ROAD

<

Grand Prix 5000

_	
- 1	
- 1	
- 1	
- 1	
1	

TECHNOLOGY



SIZES





Grand Prix 5000

ROAD

<



TECHNOLOGY



SIZES

THE NEW ERA IN CYCLING

you covered as well.



With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.



The revolutionary approach in cycling. Embedded in the tire construction the Active Comfort Technology absorbs vibrations and smoothens your ride.

Ride faster, more comfortable, and with increased puncture protection. Made to make you better. If your aim is a tubeless approach, we've got




Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.



Lazer Grip, to make you one with the road. The lazered micro profile structure expands over the tire's shoulder and provides outstanding cornering.





ROAD

<

Grand Prix 5000

Г		
	 - 1	
	 - 1	
	 - 1	

TECHNOLOGY



SIZES

7

Grand P	rix 500	0					
BlackChili Compound - Vectran Breaker - LazerGrip - ACT - 3/330 TPI							
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101620	25-584	650 x 25B	foldable	215	123	4 019238 007817	76,95
0101622	28-584	650 x 28B	foldable	235	116	4 019238 007831	76,95
0101623	23-622	700 x 23C	foldable	205	123	4 019238 007800	76,95
0101624	25-622	700 x 25C	foldable	225	123	4 019238 007824	76,95
0101947	25-622	700 x 25C	foldable	260	123	4 019238 064711	76,95
0101895	25-622	700 x 25C	foldable	230	123	4 019238 056235	76,95
0101625	28-622	700 x 28C	foldable	245	116	4 019238 007848	76,95
0101948	28-622	700 x 28C	foldable	290	116	4 019238 064728	76,95
0101896	28-622	700 x 28C	foldable	250	116	4 019238 056242	76,95
0101626	32-622	700 x 32C	foldable	290	101	4 019238 007855	76,95
BlackChili	Compoun	d - Vectran Break	ker - LazerGrip - ACT -	3/330 1	ΓΡΙ		E50
0101813	30-622	700 x 30C	foldable	260	101	4 019238 041972	76,95











Faster? Not a problem with approval for e-bikes up to 50 km/h **for the size 30-622!**

ROAD

<

Grand Prix 4-Season

TECHNOLOGY



SIZES





Grand Prix 4-Season



-			10		
		Ξ I Λ			

_		
_		
_		

SIZES

THE ALL-YEAR-ROUND TIRE AND A RELIABLE COMPANION FOR THOSE HIGH MILEAGE ROAD CYCLISTS

Reliable companion for training rides and in competition, come rain or shine. The tire with a superior durability ready for any season.



Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

<

V DuraSkin®

Tires with **DuraSkin®** sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin[®] can be identified by the characteristic brown mesh sidewall.



ROAD

<

Grand Prix 4-Season

Г		
	_	

TECHNOLOGY

Grand F	Grand Prix 4-Season							
Double Ve	ectran Brea	aker - 3/330 TPI						
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€	
0100173	23-622	700 x 23C	foldable	235	123	4 019238 409093	74,95	
0100175	25-622	700 x 25C	foldable	235	123	4 019238 409116	74,95	
0101105	28-622	700 x 28C	foldable	300	116	4 019238 674620	74,95	
0101095	32-622	700 x 32C	foldable	345	101	4 019238 668131	74,95	

▦

SIZES

Ultra Sport III

TECHNOLOGY







Ultra Sport III

=	
\equiv	

TECHNOLOGY



SIZES

MODERN TIRE FOR THOSE NEW TO ROAD CYCLING

Completely renewed, sporting a dynamic tread pattern design. Matches with a race bike, as well as a classic city road bike. Available in a wide range of dimensions and colors.



PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

E ,25/

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. Those tires marked are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.



Ultra Sport III

TECHNOLOGY



SIZES

Ultra Sport III

onnaop							
PureGrip (Compound	I - 3/180 TPI					E25
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150449	23-622	700 x 23C	foldable	250	123	4 019238 026641	29,95
0150457	25-622	700 x 25C	foldable	265	123	4 019238 026849	29,95
0150466	28-622	700 x 28C	foldable	290	116	4 019238 026917	29,95
0150680	28-622	700 x 28C	foldable	280	116	4 019238 064629	29,95
Wire - 3/18	O TPI						E25
0150450	23-622	700 x 23C	 Wire 	320	123	4 019238 026627	23,95
0150459	25-622	700 x 25C	• Wire	340	123	4 019238 026825	23,95
0150468	28-622	700 x 28C	 Wire 	360	116	4 019238 026894	23,95
0150470	32-622	700 x 32C	 Wire 	410	101	4 019238 026924	23,95
0150471	32-630	700 x 32C	 Wire 	415	101	4 019238 026931	23,95





Gator Hardshell

	_	
	- 1	
	- 1	
	- 1	

TECHNOLOGY







ROAD

<

Gator Hardshell

TECHNOLOGY



SIZES

GOHARDSHELLORGOHOME

Ideal when it comes to extremely long service life, for the next tour or the commute. Made for for rough surfaces and rugged tarmac. With DuraSkin[®] sidewall reinforcement.



Puncture protection and mileage are the strengths of Hardshell-**ProTection.** A wider PolyX Breaker[™], the specialist against punctures, under the tread centre and shoulders provides for great reliability. The three-ply – each layer with 60 TPI – carcass covers the entire tire and makes it a real bastion against urban detritus. The outer sidewalls of the tire are reinforced with DuraSkin[®] fabric providing even more reliablility due to the casing being so well protected. Hardshell tires are the punctureresistant flagship amongst racing tires.

V DuraSkin®

Tires with **DuraSkin®** sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin[®] can be identified by the characteristic brown mesh sidewall*.

*DuraSkin[®] comes in restrained black with our Black Edition



Gator Hardshell

TECHNOLOGY



SIZES

 \square

Gator H	lardshel						
Hardshel	I - 3/180 TP						
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0100311	23-622	700 x 23C	foldable	270	123	4 019238 466379	61,95
0100313	25-622	700 x 25C	foldable	275	123	4 019238 466409	61,95
0100639	28-622	700 x 28C	foldable	335	116	4 019238 581423	61,95
0100640	32-622	700 x 32C	foldable	380	101	4 019238 581416	61,95
Wire - 3/1	80 TPI						
0100310	23-622	700 x 23C	 Wire 	345	123	4 019238 466362	55,95
0100312	25-622	700 x 25C	 Wire 	345	123	4 019238 466393	55,95
0100314	28-622	700 x 28C	 Wire 	410	115	4 019238 466423	55,95
0100435	32-622	700 x 32C	 Wire 	450	101	4 019238 521542	55,95
0100315	32-630	27 x 1¼	 Wire 	450	101	4 019238 466430	55,95



Gator Hardshell Black Edition

Hardshell	- 3/180 TP	l					
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101724	23-622	700 x 23C	foldable	270	123	4 019238 030846	66,95
0101725	25-622	700 x 25C	foldable	275	123	4 019238 030839	66,95
0101726	28-622	700 x 28C	foldable	335	116	4 019238 030822	66,95
0101727	32-622	700 x 32C	foldable	380	101	4 019238 030815	66,95





Gatorskin

- E	

TECHNOLOGY







Gatorskin

ROAD

<



TECHNOLOGY		 	
	TE		
		NL JI	



SIZES

RIDE HOW AND WHERE YOU WANT: THE GLOBAL NUMBER ONE FOR FIXED, MESSENGER AND URBAN **CYCLISTS**

The right tire when it comes to tough conditions. The right choice for a strong performance in the urban field and on tour.



With **PolyX Breaker™** car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.

V DuraSkin®

Tires with **DuraSkin®** sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin[®] can be identified by the characteristic brown mesh sidewall*.

*DuraSkin[®] comes in restrained black with our Black Edition



Gatorskin

ROAD

<

Г	
1.	

TECHNOLOGY



SIZES

 \square

Gators	kin						
PolyX Bre	aker - 3/180	O TPI					
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0118538	23-622	700 x 23C	foldable	235	123	4 019238 334647	52,95
0100084	25-622	700 x 25C	foldable	250	123	4 019238 371390	52,95
0100641	28-622	700 x 28C	foldable	290	116	4 019238 581430	52,95
0100642	32-622	700 x 32C	foldable	355	101	4 019238 581447	52,95
Wire - 3/18	80 TPI						
0118365	28-559	26 x 11⁄8	 Wire 	330	116	4 019238 334708	47,95
0118364	23-571	650 x 23C	 Wire 	280	123	4 019238 334692	47,95
0118537	23-622	700 x 23C	 Wire 	310	123	4 019238 334630	47,95
0118539	25-622	700 x 25C	 Wire 	320	123	4 019238 334661	47,95
0121228	28-622	700 x 28C	 Wire 	365	116	4 019238 334678	47,95
0100437	32-622	700 x 32C	 Wire 	425	101	4 019238 521573	47,95
0122300	32-630	27 x 1¼	 Wire 	425	101	4 019238 334685	47,95

Poly Breaker™ ↓ DuraSkin®

Gatorskin Black Edition

PolyX Bre	eaker - 3/180	O TPI					
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101728	23-622	700 x 23C	foldable	235	123	4 019238 030877	58,95
0101729	25-622	700 x 25C	foldable	250	123	4 019238 030860	58,95
0101730	28-622	700 x 28C	foldable	290	116	4 019238 030884	58,95
0101731	32-622	700 x 32C	foldable	355	101	4 019238 030853	58,95




Grand Sport Race

_	_
- 12	 _

TECHNOLOGY



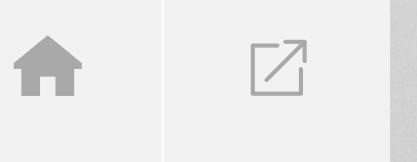



Grand Sport Race



TECHNOLOGY



SIZES

PROVEN RACING TIRE CONTOUR FOR RESPONSIVE HANDLING AND SECURE GRIP


Performance in touring and competition. This all-rounder is ready for every challenge, even the biggest ones.



PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.



The Nytech Breaker is based on the technology of our Safety-System puncture protection. Made of nylon fibre and similar to Kevlar, it reliably protects against punctures and cuts. It also has particularly low rolling resistance and reduced weight, perfect for our performance range of road tires.



Grand Sport Race

	- 1	

TECHNOLOGY

Grand Sport Race


PureGrip Compound - NyTech Breaker - 3/180 TPI

Puledip	Compound	I - INVIÈCII DI Edk	ei - 3/100 1 PI				
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150001	23-622	700 X 23C	foldable	245	123	4 019238 586565	38,95
0150027	25-622	700 X 25C	foldable	270	123	4 019238 587319	38,95
0150118	28-622	700 X 28C	foldable	335	116	4 019238 621105	38,95
0150141	32-622	700 X 32C	foldable	400	101	4 019238 656602	38,95



Ny TechBREAKER






Hometrainer II

- 1	

TECHNOLOGY







Hometrainer II

1	

TECHNOLOGY


	-			
	+			
	╋	Н	_	
L 1	-	-		

SIZES

THE KM ACCUMULATOR ON THE ROLLERS

Developed for the essential basic training at home. Particularly smooth running. The durable cold-running compound stops heat build up. ! Suitable for training on rollers/home trainers only.

Hometr	ainer II						
Foldable -	3/180 TPI						
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0100648	47-559	26 x 1.75	foldable	375	65	4 019238 581454	40,95
0101275	50-584	27.5 x 2.00	foldable	375	65	4 019238 730456	40,95
0100647	23-622	700 x 23C	foldable	210	123	4 019238 581461	40,95
0100649	32-622	700 x 32C	foldable	280	101	4 019238 581478	40,95
	Foldable - Article 0100648 0101275 0100647	Foldable - 3/180 TPI Article ETRTO 0100648 47-559 0101275 50-584 0100647 23-622	ArticleETRTODimension010064847-55926 x 1.75010127550-58427.5 x 2.00010064723-622700 x 23C	Foldable - 3/180 TPI Article ETRTO Dimension Color/sidewall 0100648 47-559 26 x 1.75 foldable 0101275 50-584 27.5 x 2.00 foldable 0100647 23-622 700 x 23C foldable	Foldable - 3/180 TPI Article ETRTO Dimension Color/sidewall g 0100648 47-559 26 x 1.75 foldable 375 0101275 50-584 27.5 x 2.00 foldable 375 0100647 23-622 700 x 23C foldable 210	Foldable - 3/180 TPI Article ETRTO Dimension Color/sidewall g PSI 0100648 47-559 26 x 1.75 foldable 375 65 0101275 50-584 27.5 x 2.00 foldable 375 65 0100647 23-622 700 x 23C foldable 210 123 	Foldable - 3/180 TPI Article ETRTO Dimension Color/sidewall g PSI EAN 0100648 47-559 26 x 1.75 foldable 375 65 4 019238 581454 0101275 50-584 27.5 x 2.00 foldable 375 65 4 019238 730456 0100647 23-622 700 x 23C foldable 210 123 4 019238 581461

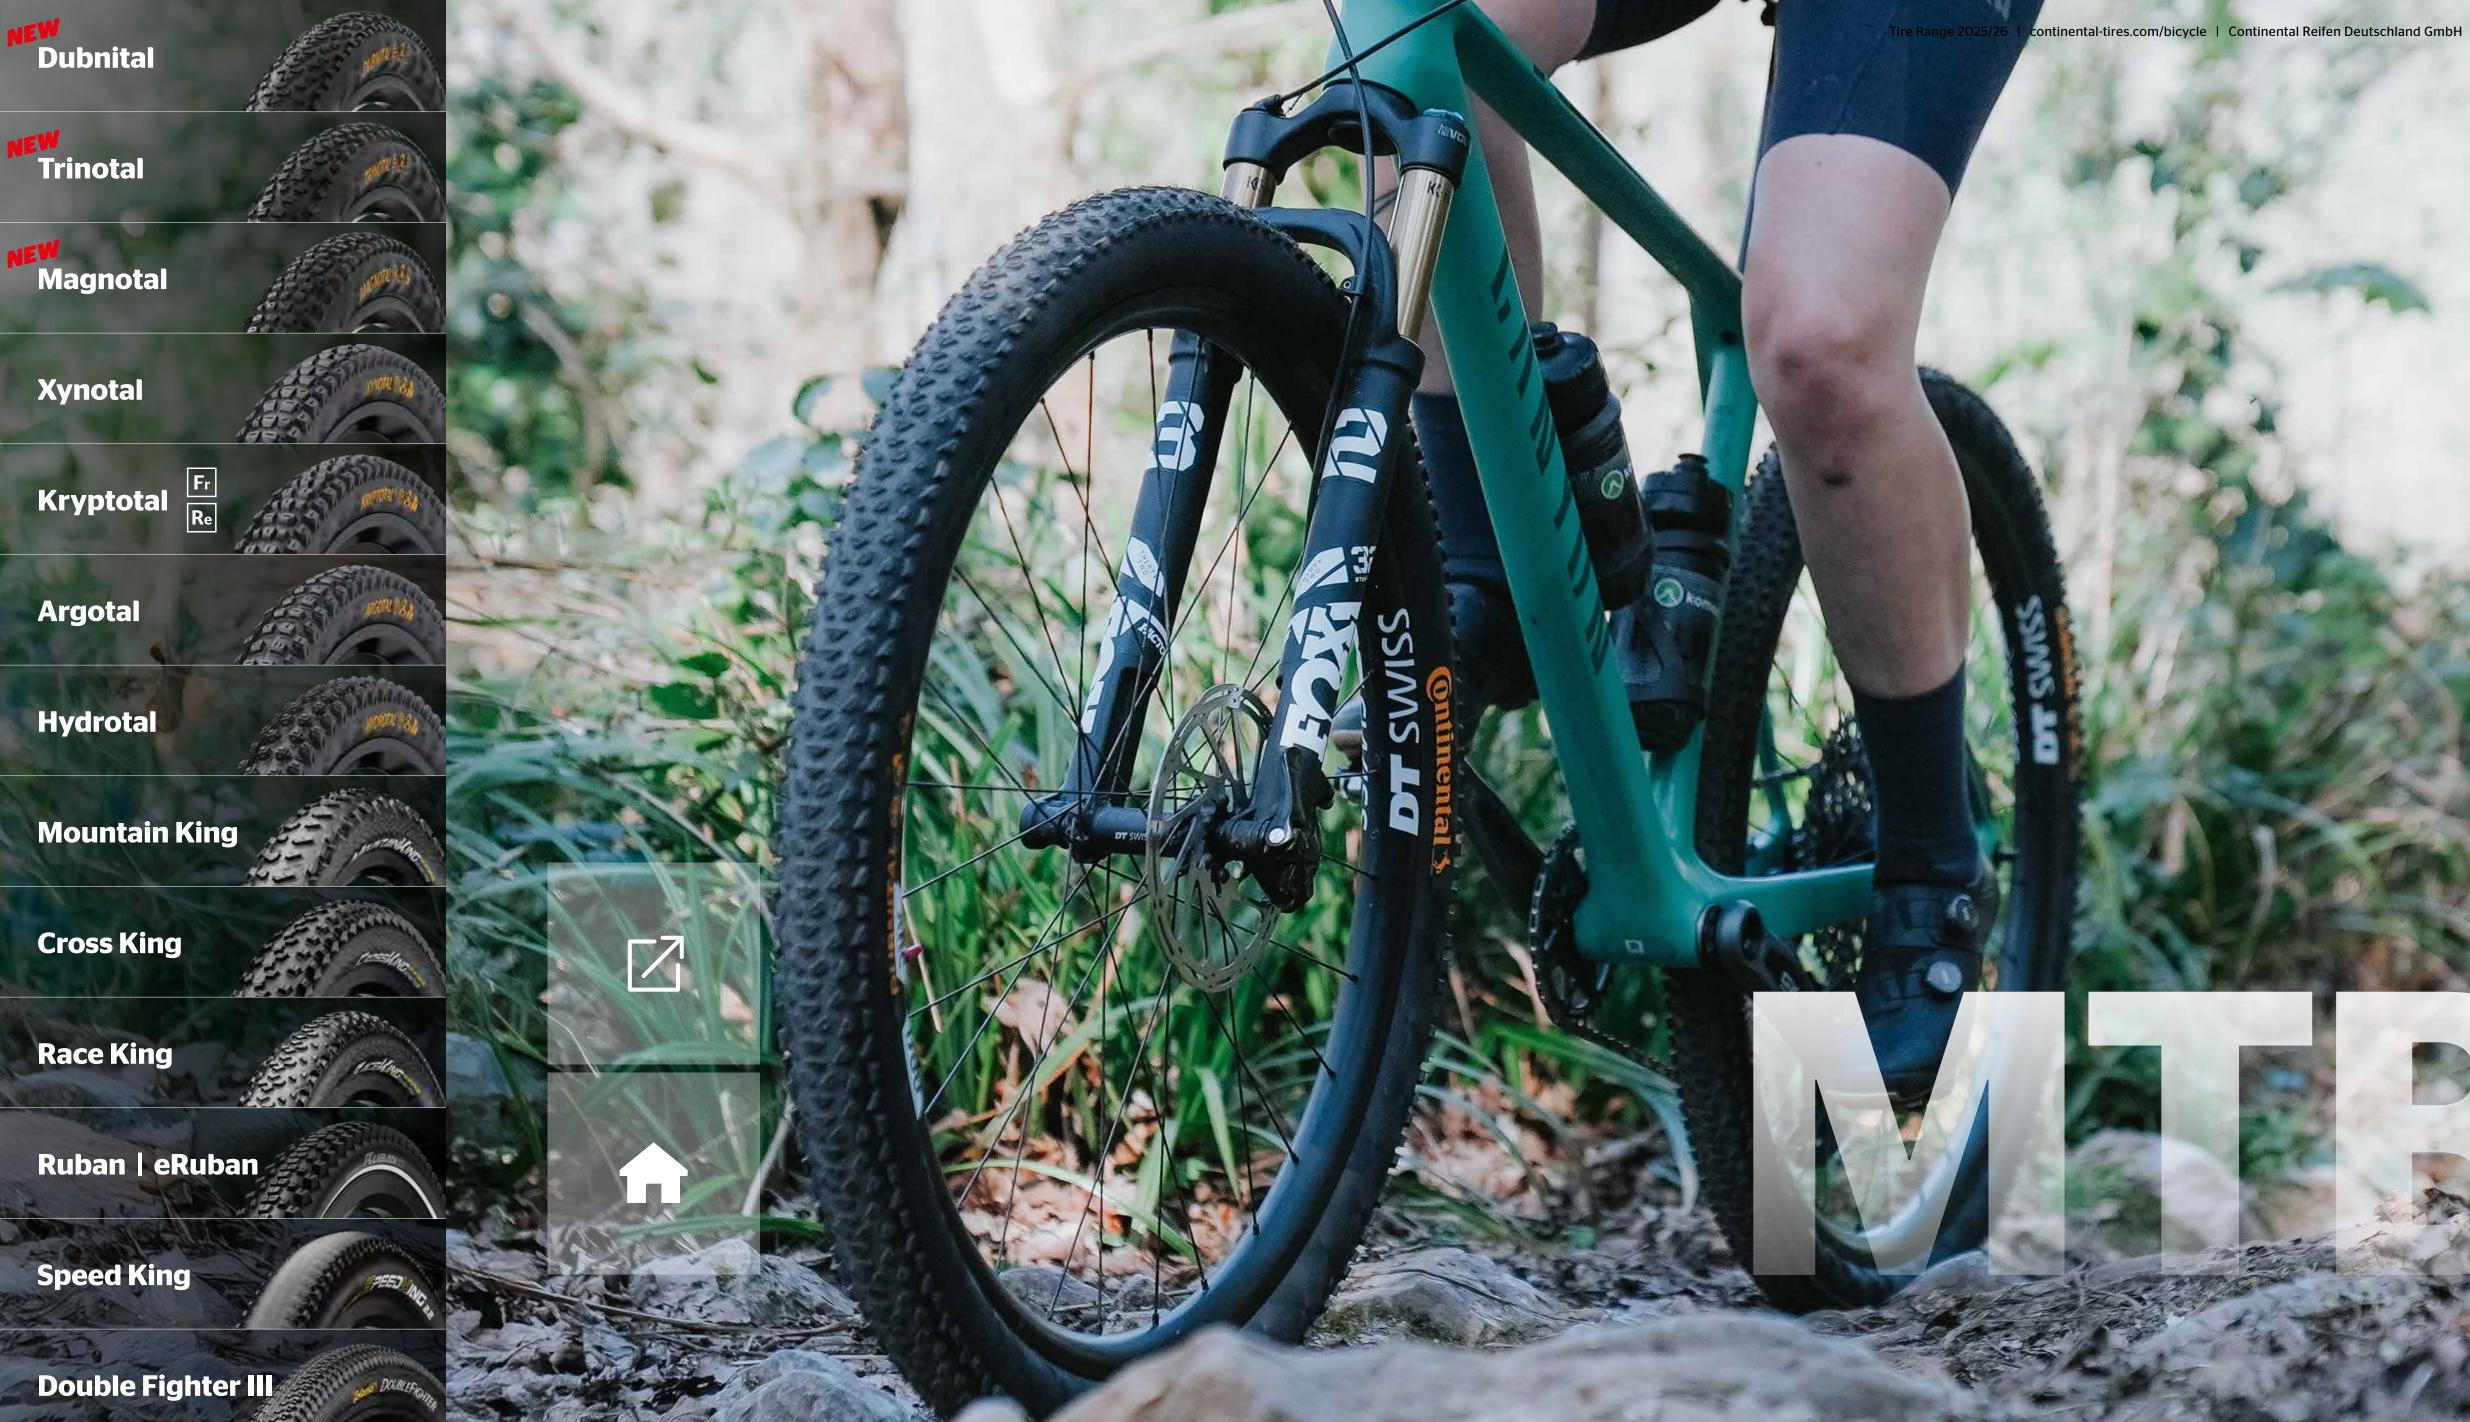



Dubnital

_	_
	٦.

TECHNOLOGY



SIZES

A





Dubnital

_	
=	

TECHNOLOGY



SIZES

MASTER OF SPEED

Dubnital is designed for dry to damp conditions and for rocky, hardpack, and medium loose soils. Master the challenges of modern cross-country and downcountry riding at speed. Dubnital supersedes its predecessor, the championed 'Race King', and takes performance to the next level.

TERRAIN



deal for hardpack terrain

CASING



Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.




Race: The lightest and fastest construction in our MTB line-up. Perfect for modern Cross and Down-Country riding and racing

COMPOUND



Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.



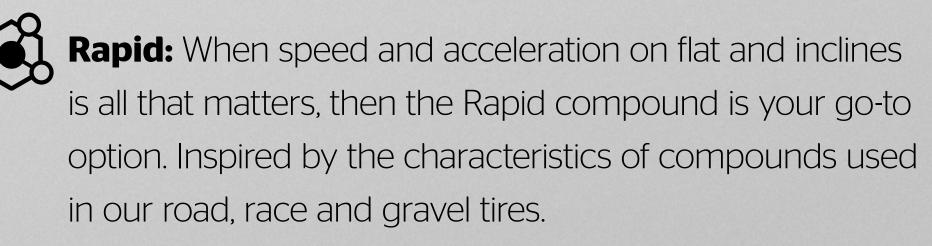

Dubnital

TECHNOLOGY



SIZES

Dubnita							
Race Rapi	d - 3/330 T	PI	$\textcircled{\texttt{O}}$			E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0102041	55-622	29 x 2.20	foldable	610	58	4 019238 402797	73,95
0102037	60-622	29 x 2.40	foldable	645	50	4 019238 402629	73,95
0102038	60-622	29 x 2.40	foldable	685	50	4 019238 402605	73,95
Race Grip	- 3/330 TP	I	$\textcircled{\texttt{I}}$			E25	TR
0102039	60-622	29 x 2.40	foldable	650	50	4 019238 402582	70,95
0102040	60-622	29 x 2.40	foldable	690	50	4 019238 402568	70,95
Trail Rapic	1 - 3/330 TI	כן				E25	TR
0150788	55-584	27.5 x 2.20	foldable	615	58	4 019238 402766	70,95
0150787	60-584	27.5 x 2.40	foldable	645	50	4 019238 402773	70,95
0150786	55-622	29 x 2.20	foldable	655	58	4 019238 402810	70,95
0150782	60-622	29 x 2.40	foldable	690	50	4 019238 402896	70,95
0150783	60-622	29 x 2.40	foldable	685	50	4 019238 402872	70,95
Trail Grip -	- 3/330 TPI					E25	TR
0150784	60-622	29 x 2.40	foldable	725	50	4 019238 402858	66,95
0150785	60-622	29 x 2.40	foldable	725	50	4 019238 402834	66,95

<


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Trinotal

_	_
- E	1
- L.	

TECHNOLOGY







Trinotal

\equiv	
—	

TECHNOLOGY



SIZES

CONTROL THE TERRAIN

Trinotal is truly versatile, designed to be ridden on hard and light mixed soils whether dry or damp. Trinotal supersedes its predecessor, the popular 'Cross King'. Conquer the varied challenges of modern cross-country and downcountry riding.

TERRAIN



Ideal for hardpack and mixed terrain

CASING



Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.



Race: The lightest and fastest construction in our MTB line-up. Perfect for modern Cross and Down-Country riding and racing

COMPOUND



Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.



Rapid: When speed and acceleration on flat and inclines is all that matters, then the Rapid compound is your go-to option. Inspired by the characteristics of compounds used in our road, race and gravel tires.

Trinotal

Г	
1.	

TECHNOLOGY



SIZES

Trinota							
Race Rapi	d - 3/330 T	PI				E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0102032	60-622	29 x 2.40	foldable	720	50	4 019238 402544	73,95
0102033	60-622	29 x 2.40	foldable	760*	50	4 019238 402520	73,95
Race Grip	- 3/330 TP					E25	TR
0102036	55-622	29 x 2.20	foldable	615	58	4 019238 402469	70,95
0102034	60-622	29 x 2.40	foldable	725	50	4 019238 402506	70,95
0102035	60-622	29 x 2.40	foldable	765*	50	4 019238 402483	70,95
Trail Rapic	1 - 3/330 TF)				E25	TR
0150774	60-622	29 x 2.40	foldable	710	50	4 019238 402759	70,95
0150775	60-622	29 x 2.40	foldable	710	50	4 019238 402735	70,95
Trail Grip -	- 3/330 TPI					E25	TR
0150781	55-559	26 x 2.20	foldable	610	58	4 019238 402636	63,95
0150780	55-584	27.5 x 2.20	foldable	635	58	4 019238 402643	66,95
0150779	60-584	27.5 x 2.40	foldable	710	50	4 019238 402650	66,95
0150778	55-622	29 x 2.20	foldable	685	58	4 019238 402674	66,95
0150776	60-622	29 x 2.40	foldable	740	50	4 019238 402711	66,95
0150777	60-622	29 x 2.40	foldable	740	50	4 019238 402698	66,95



<

KNOWLEDGE CONTI


Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

*preliminary estimation





Magnotal

	_
- E	 1
- L.	

TECHNOLOGY



SIZES





MTB

<

Magnotal

TECHNOLOGY

SIZES

DOMINATE WHEREVER YOU RIDE

Magnotal is designed for dry to wet conditions for hard, loose or muddy soils. It is the go-to solution for aggressive down-country, all-mountain and trail use cases. The newly designed tread pattern and casing sets a new standard for an all-rounder MTB tire – closing the gap to our Gravity range.

TERRAIN



Ideal for **mixed** and **loose** terrain

CASING



Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.

COMPOUND



Soft: Designed for descending-orientated use cases in the Trail and Enduro segment. The Soft compound offers high levels of grip with reasonable rolling resistance. Useable as a complete Front-Rear combination or a Front-wheel-only option for increased grip in Trail and All-Mountain use cases.



Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.

Magnotal

Г		
	 _	

TECHNOLOGY



SIZES

Magnot	tal						
Trail Soft -	3/330 TPI					E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150771	60-584	27.5 x 2.40	foldable	785*	50	4 019238 401967	68,95
0150773	65-584	27.5 x 2.60	foldable	895*	43	4 019238 401929	72,95
0150765	60-622	29 x 2.40	foldable	840	50	4 019238 402063	68,95
0150766	60-622	29 x 2.40	foldable	835	50	4 019238 402049	68,95
0150769	65-622	29 x 2.60	foldable	965*	43	4 019238 402001	72,95
Trail Grip -	- 3/330 TPI					E25	TR
0150770	60-584	27.5 x 2.40	foldable	745	50	4 019238 401981	66,95
0150772	65-584	27.5 x 2.60	foldable	905	43	4 019238 401943	70,95
0150763	60-622	29 x 2.40	foldable	805	50	4 019238 402100	66,95
0150764	60-622	29 x 2.40	foldable	800	50	4 019238 402087	66,95
0150768	65-622	29 x 2.60	foldable	965	43	4 019238 402025	70,95



<

Tire Range 2025/26 con	ntinental-tires.com/bicycle	Continental Reifen Deutschland GmbH
--------------------------	-----------------------------	-------------------------------------


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Xynotal

TECHNOLOGY



SIZES



-

\$



Xynotal

\equiv	
—	

TECHNOLOGY

SIZES

CONTROL OVER ROCK AND HARDPACK TERRAIN

With low rolling resistance and contact edges for improved traction and braking, you can enjoy a fast gravity ride with the confidence of continuous grip when you need it most.

TERRAIN



Perfect for hardpack, rocky surfaces

CASING



Downhill: Most durable and reinforced carcass construction in gravity line up



Enduro: Durable single ply carcass construction with Apex to prevent snakebites




Trail: Comparable performance to the Enduro casing tailored for trail use cases

COMPOUND



SuperSoft: Especially for Downhill and Enduro use cases where the main focus is descending. Tires equipped with this compound are for riders with a 100% focus on grip, traction, control.



Soft: The balance of grip and rolling resistance for gravity focussed use cases. High level of grip with a reasonable rolling resistance



Endurance: Compound with balanced properties on grip and endurance. With the endurance compound a high durability in combination with good rolling resistance and grip is achieved.

Xynotal

TECHNOLOGY



SIZES

Xynota							
Downhill S	SuperSoft -	- 6/660 TPI				E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101931	60-584	27.5 x 2.40	foldable	1260	50	4 019238 063370	91,95
0101932	60-622	29 x 2.40	foldable	1335	50	4 019238 063356	91,95
Downhill S	Soft - 6/660	O TPI					
0101995	60-584	27.5 x 2.40	foldable	1260	50	4 019238 080742	86,95
0101996	60-622	29 x 2.40	foldable	1340	50	4 019238 080735	86,95
Enduro Sc	oft - 3/330 ⁻	TPI					
0150644	60-584	27.5 x 2.40	foldable	1100	50	4 019238 063295	76,95
0150645	60-622	29 x 2.40	foldable	1165	50	4 019238 063288	76,95
Trail Endu	rance - 3/1	80 TPI	× 4				
0150646	60-584	27.5 x 2.40	foldable	1000	50	4 019238 063257	64,95
0150647	60-622	29 x 2.40	foldable	1060	50	4 019238 063240	64,95
0150823	65-584	27.5 x 2.60	foldable	1155	43	4 019238 309218	69,95



<


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Kryptotal Fr

Kryptotal Re



TECHNOLOGY



SIZES Fr



SIZES Re





Kryptotal F

Kryptotal Re

Г		٦
	 -	

TECHNOLOGY



SIZES Fr



SIZES Re

SPECIALISTS FOR MIXED TERRAIN

Optimized for front and rear wheels, this all-round tire achieves the perfect balance of stability, traction and optimal rolling resistance. Ideal for mixed terrain, they'll allow you to push your limits during trail, enduro and downhill riding.

TERRAIN



Ideal for **mixed** terrain conditions

CASING



Downhill: Most durable and reinforced carcass construction in gravity line up



Enduro: Durable single ply carcass construction with Apex to prevent snakebites




Trail: Comparable performance to the Enduro casing tailored for trail use cases

COMPOUND



SuperSoft: Especially for Downhill and Enduro use cases where the main focus is descending. Tires equipped with this compound are for riders with a 100% focus on grip, traction, control.



Soft: The balance of grip and rolling resistance for gravity focussed use cases. High level of grip with a reasonable rolling resistance.



Endurance: Compound with balanced properties on grip and endurance. With the endurance compound a high durability in combination with good rolling resistance and grip is achieved.

Г	
	 ·
	 .
	 - 1

TECHNOLOGY

- 1	Ц	_	
- 1		_	
- 1		_	
- 1		_	

SIZES Fr



SIZES Re

	Krypto	tal Fr						
	Downhill	SuperSoft ·	- 6/660 TPI	(1)			E25	TR
	Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
	0101956	60-584	27.5 x 2.40	foldable	1260	50	4 019238 070514	91,95
	0101957	60-622	29 x 2.40	foldable	1335	50	4 019238 070491	91,95
	Downhill	Soft - 6/66	Ο ΤΡΙ	0				
EW	0150818	60-622	29 x 2.40	foldable	1315	50	4 019238 309270	86,95
	Enduro Si	uperSoft - 3	3/330 TPI	🛞 👶 🔒				
EW	0102074	60-622	29 x 2.40	foldable	1205	50	4 019238 309263	81,95
	Enduro So	oft - 3/330	🕲 👶 🔒					
	0150705	60-559	26 x 2.40	foldable	1055	50	4 019238 089752	71,95
	0150694	60-584	27.5 x 2.40	foldable	1095	50	4 019238 074116	76,95
	0150696	60-622	29 x 2.40	foldable	1165	50	4 019238 074079	76,95
EW	0150820	65-622	29 x 2.60	foldable	1315	43	4 019238 309249	81,95
	Trail Soft	- 3/180 TPI						
EW	0150819	60-622	29 x 2.40	foldable	1055	50	4 019238 309256	69,95
	Trail Endu	irance - 3/1	80 TPI	\$€				
EW	0150725	60-406	20 x 2.40	foldable	685	58	4 019238 098020	55,95
EW	0150709	60-507	24 x 2.40	foldable	840	50	4 019238 089776	61,95
	0150695	60-584	27.5 x 2.40	foldable	1000	50	4 019238 074093	64,95
	0150697	60-622	29 x 2.40	foldable	1060	50	4 019238 074055	64,95
EW	0150821	65-622	29 x 2.60	foldable	1235	43	4 019238 309232	69,95



N


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





	L
	L
	L
	L

TECHNOLOGY



SIZES Fr



SIZES Re

	yptot							
Dov	wnhill S	SuperSoft -	- 6/660 TPI				E25	TR
Art	icle	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
010)1928	60-584	27.5 x 2.40	foldable	1260	50	4 019238 063219	91,95
010)1930	60-622	29 x 2.40	foldable	1335	50	4 019238 063196	91,95
Dov	wnhill S	6/660 Soft	Ο ΤΡΙ	D 💭 🐼 👫				
010)1991	60-584	27.5 x 2.40	foldable	1260	50	4 019238 080780	86,95
010)1992	60-622	29 x 2.40	foldable	1340	50	4 019238 080773	86,95
015	50822	65-584	27.5 x 2.60	foldable	1405	43	4 019238 309225	91,95
Enc	duro So	oft - 3/330 ⁻	TPI	🕲 👶 🔒				
015	50707	60-559	26 x 2.40	foldable	1055	50	4 019238 089738	71,95
015	50632	60-584	27.5 x 2.40	foldable	1095	50	4 019238 063134	76,95
015	50634	60-622	29 x 2.40	foldable	1165	50	4 019238 063127	76,95
015	50635	65-584	27.5 x 2.60	foldable	1240	43	4 019238 063097	81,95
015	50636	65-622	29 x 2.60	foldable	1315	43	4 019238 063080	81,95
Tra	il Endu	rance - 3/1	80 TPI	\$€\$				
015	50724	60-406	20 x 2.40	foldable	685	58	4 019238 098044	55,95
015	0708	60-507	24 x 2.40	foldable	840	50	4 019238 089790	61,95
015	50637	60-584	27.5 x 2.40	foldable	1000	50	4 019238 063059	64,95
015	50638	60-622	29 x 2.40	foldable	1060	50	4 019238 063042	64,95
015	50639	65-584	27.5 x 2.60	foldable	1160	43	4 019238 063011	69,95
015	50640	65-622	29 x 2.60	foldable	1240	43	4 019238 063004	69,95




KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Argotal

_	_
- E	

TECHNOLOGY



SIZES





Argotal



TECHNOLOGY

SIZES

ENGINEERED FOR LOOSE CONDITIONS

The ideal tire for loose terrain given its incredible cornering stability and enhanced side-grip. The open tread pattern allows for self-cleaning so you can push your limits while riding through dust and loam.

TERRAIN



deal for loose terrain

CASING



Downhill: Most durable and reinforced carcass construction in gravity line up



Enduro: Durable single ply carcass construction with Apex to prevent snakebites




Trail: Comparable performance to the Enduro casing tailored for trail use cases

COMPOUND



SuperSoft: Especially for Downhill and Enduro use cases where the main focus is descending. Tires equipped with this compound are for riders with a 100% focus on grip, traction, control.





Soft: The balance of grip and rolling resistance for gravity focussed use cases. High level of grip with a reasonable rolling resistance



Endurance: Compound with balanced properties on grip and endurance. With the endurance compound a high durability in combination with good rolling resistance and grip is achieved.

Argotal

1.	

TECHNOLOGY

SIZES

SuperSoft -	6/660 TPI				E25	TR
ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
60-584	27.5 x 2.40	foldable	1260	50	4 019238 067866	91,95
60-622	29 x 2.40	foldable	1335	50	4 019238 067842	91,95
50ft - 6/660	O TPI	0				
60-584	27.5 x 2.40	foldable	1260	50	4 019238 080704	86,95
60-622	29 x 2.40	foldable	1340	50	4 019238 080698	86,95
iperSoft - 3	8/330 TPI	🕸 👶 🚱				
60-622	29 x 2.40	foldable	1205	50	4 019238 309287	81,95
oft - 3/330	ΓΡΙ	🕸 🛃 🔒				
60-584	27.5 x 2.40	foldable	1095	50	4 019238 068016	76,95
60-622	29 x 2.40	foldable	1165	50	4 019238 068078	76,95
65-584	27.5 x 2.60	foldable	1240	43	4 019238 067910	81,95
65-622	29 x 2.60	foldable	1315	43	4 019238 067958	81,95
rance - 3/1	80 TPI	× & &				
60-584	27.5 x 2.40	foldable	1005	50	4 019238 067972	64,95
60-622	29 x 2.40	foldable	1060	50	4 019238 068030	64,95
65-584	27.5 x 2.40	foldable	1160	50	4 019238 067897	69,95
65-622	29 x 2.60	foldable	1240	43	4 019238 067934	69,95
	SuperSoft - ETRTO 60-584 60-622 60-622 60-622 60-622 60-622 60-622 60-622 60-622 60-584 60-622 60-622 60-622 60-622 60-622 60-622 60-584 60-622 60-622 60-622 60-622 60-584 60-622 60-584 60-584 60-584 60-584 60-584 60-584 60-584	SuperSoft - G/660 TPI ETRTO Dimension 60-584 27.5 x 2.40 60-622 29 x 2.40 60-584 27.5 x 2.40 60-622 29 x 2.40 60-584 27.5 x 2.40 60-584 27.5 x 2.40 60-622 29 x 2.40 60-622 29 x 2.40	SuperSoft - 6/660 TPI () () () () () ETRTO Dimension Color/sidewall 60-584 27.5 × 2.40 foldable 60-622 29 × 2.40 foldable 60-622 29 × 2.40 foldable 60-584 27.5 × 2.40 foldable 60-622 29 × 2.40 foldable 65-584 27.5 × 2.40 foldable 65-622 29 × 2.40 foldable 60-584 27.5 × 2.40 foldable 60-584 27.5 × 2.40 foldable 60-622 29 × 2.40 foldable 60-622 29	SuperSoft - 6/660 TPI $(\bigcirc (\bigcirc$	SuperSoft - 6/660 TPI (I)	SuperSoft - 6/660 TPI (I)



NEV


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Hydrotal

_	_
- E	

TECHNOLOGY



SIZES





Hydrotal

\equiv	
—	

TECHNOLOGY

SIZES

DOMINATES THE WET AND MUD

Our specialist tire for downhill riding which also provides a super-soft compound option for racing. Hydrotal balances grip and rolling resistance and features a selfcleaning tread to ensure consistent grip when you're shredding through muddy, slippery conditions.

TERRAIN



Specialist for **mud** terrain

CASING



Downhill: Most durable and reinforced carcass construction in gravity line up

COMPOUND



SuperSoft: Especially for Downhill and Enduro use cases where the main focus is descending. Tires equipped with this compound are for riders with a 100% focus on grip, traction, control.



Hydrotal

Г	 1
- L.	

TECHNOLOGY

Hydrotal									
Downhill S	SuperSoft -	6/660 TPI				E25	TR		
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€		
0101954	60-584	27.5 x 2.40	foldable	1260	50	4 019238 067880	91,95		
0101955	60-622	29 x 2.40	foldable	1335	50	4 019238 067873	91,95		





SIZES



<


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Mountain King

- 6		
	_	

TECHNOLOGY



SIZES





Mountain King

1	

TECHNOLOGY



SIZES

FOR SAFE OFF-ROADING

maximum grip.




PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

The perfect trail ride companion - not stingy on grip, ideal for full-suspension trail bikes. The snappy central knobs and grippy outer knobs means it offers



The ShieldWall System combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.



Mountain King

		-	
		-	
		-	
_	_	-	

TECHNOLOGY



SIZES

Μ	OU	h	ta	in	Ki	ĥ	a

Mounta	in King						
PureGrip (Compound	- ShieldWall System	- 3/180 TPI			E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150301	58-559	26 x 2.30	foldable	710	55	4 019238 798333	40,95
0150289	58-584	27.5 x 2.30	foldable	770	55	4 019238 798302	40,95
0150335	65-584	27.5 x 2.60	foldable	935	43	4 019238 003598	45,95
0150334	70-584	27.5 x 2.80	foldable	1015	40	4 019238 003628	45,95
0150294	58-622	29 x 2.30	foldable	795	55	4 019238 798340	40,95
Wire - 3/18	BO TPI						E25
0150424	58-559	26 x 2.30	 Wire 	710	55	4 019238 026207	25,95
0150425	58-584	27.5 x 2.30	 Wire 	770	55	4 019238 026191	25,95
0150427	58-622	29 x 2.30	 Wire 	785	55	4 019238 026177	25,95
SAMPLE STREET, S							



KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.



Cross King



TECHNOLOGY



SIZES SHIELDWALL



SIZES WIRE





Cross King

Г	١

TECHNOLOGY



SIZES SHIELDWALL



SIZES WIRE

THE ALL-ROUNDER


Versatile competition and trail tire, sure footed in turns and comfortable. Good grip and available with various technologies. Smoothly rolling tire that adapts to any terrain with its special tread.

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.



The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.



Cross King

TECHNOLOGY



SIZES SHIELDWALL



SIZES WIRE

Cross K	ing						
PureGrip (Compound	l - ShieldWall System	n - 3/180 TPI			E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150310	50-559	26 x 2.00	foldable	590	65	4 019238 797459	40,95
0150303	55-559	26 x 2.20	foldable	670	58	4 019238 797480	40,95
0150302	58-559	26 x 2.30	foldable	710	55	4 019238 798319	40,95
0150308	50-584	27.5 x 2.00	foldable	670	65	4 019238 797466	40,95
0150291	55-584	27.5 x 2.20	foldable	740	58	4 019238 797503	40,95
0150290	58-584	27.5 x 2.30	foldable	775	55	4 019238 798296	40,95
0150337	65-584	27.5 x 2.60	foldable	920	43	4 019238 003581	45,95
0150336	70-584	27.5 x 2.80	foldable	1045	40	4 019238 003611	45,95
0150306	50-622	29 x 2.00	foldable	710	65	4 019238 797473	40,95
0150295	55-622	29 x 2.20	foldable	745	58	4 019238 797497	40,95
0150297	58-622	29 x 2.30	foldable	795	55	4 019238 798326	40,95
0150502	65-622	29 x 2.60	foldable	1000	43	4 019238 037258	45,95





Tire Range 2025/26	continental-tires.com/bicycle	Continental Reifen Deutschland GmbH
--------------------	-------------------------------	-------------------------------------

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.



Cross King

	J

TECHNOLOGY



SIZES SHIELDWALL



SIZES WIRE

Cross King

C1055 N	ing						
Wire - 3/18	ΒΟ ΤΡΙ						E25
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101687	50-406	20 x 2.00	 Wire 	460	65	4 019238 026344	14,95
0101688	50-507	24 x 2.00	 Wire 	565	65	4 019238 026337	20,95
0150399	50-559	26 x 2.00	 Wire 	605	65	4 019238 024968	25,95
0150404	55-559	26 x 2.20	 Wire 	670	58	4 019238 024999	25,95
0150407	58-559	26 x 2.30	 Wire 	710	55	4 019238 025019	25,95
0150402	50-584	27.5 x 2.00	 Wire 	675	65	4 019238 024975	25,95
0150405	55-584	27.5 x 2.20	 Wire 	740	58	4 019238 025002	25,95
0150408	58-584	27.5 x 2.30	 Wire 	775	55	4 019238 025033	25,95
0150403	50-622	29 x 2.00	 Wire 	720	65	4 019238 024982	25,95
0150406	55-622	29 x 2.20	 Wire 	745	58	4 019238 025026	25,95
0150410	58-622	29 x 2.30	 Wire 	785	55	4 019238 025057	25,95



Race King



TECHNOLOGY



SIZES SHIELDWALL



SIZES WIRE





Race King

	Г	
\equiv		

TECHNOLOG	V
TECHNOLOG	I Y



SIZES SHIELDWALL



SIZES WIRE

FIRST CHOICE FOR RACERS


Classic competition tire which feels at home at the Cross Country World Cup or at marathons. Low rolling resistance, good self-damping and low weight make it the right choice for all race bikes.



PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.



The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.



Race King

	-

TECHNOLOGY



SIZES SHIELDWALL

Race Ki	ng						
PureGrip (Compound	- ShieldWall System	- 3/180 TPI			E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150311	50-559	26 x 2.00	foldable	545	65	4 019238 797510	40,95
0150304	55-559	26 x 2.20	foldable	640	58	4 019238 797541	40,95
0150309	50-584	27.5 x 2.00	foldable	625	65	4 019238 797527	40,95
0150292	55-584	27.5 x 2.20	foldable	680	58	4 019238 797565	40,95
0150307	50-622	29 x 2.00	foldable	665	65	4 019238 797534	40,95
0150296	55-622	29 x 2.20	foldable	720	58	4 019238 797558	40,95







SIZES WIRE



KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.



Race King

E	
	_

TECHNOLOGY



SIZES SHIELDWALL



SIZES WIRE



Race Ki	ng						
Wire - 3/18	SO TPI						E25
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150429	50-559	26 x 2.00	 Wire 	555	65	4 019238 026153	25,95
0150432	55-559	26 x 2.20	 Wire 	650	58	4 019238 026122	25,95
0150445	50-584	27.5 x 2.00	Wire Refl.	645	65	4 019238 026221	30,95
0150430	50-584	27.5 x 2.00	 Wire 	640	65	4 019238 026146	25,95
0150525	55-584	27.5 x 2.20	Wire Refl.	690	58	4 019238 048377	30,95
0150433	55-584	27.5 x 2.20	Wire	680	58	4 019238 026115	25,95
0150446	50-622	29 x 2.00	Wire Refl.	685	65	4 019238 026214	30,95
0150431	50-622	29 x 2.00	Wire	680	65	4 019238 026139	25,95
0150527	55-622	29 x 2.20	Wire Refl.	730	58	4 019238 048391	30,95
0150435	55-622	29 x 2.20	 Wire 	725	58	4 019238 026092	25,95



<

Ruban

eRuban Plus

- 6	

TECHNOLOGY



SIZES RUBAN SHIELDWALL



SIZES RUBAN WIRE



SIZES eRUBAN





<

TECHNOLOGY

Г		1
		I
	+++-	I
		I
		1

SIZES RUBAN SHIELDWALL



SIZES RUBAN WIRE



SIZES eRUBAN



FROM RURAL TO URBAN

The energy-saving SUV allrounder that gets you to both Rural and Urban. The partner for your commute, running errands and the weekend tour.

PURE GRIP COMPOUND


PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.



With **PolyX Breaker™** car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.



The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.



- 6	 _
	 - 1
	 - I.
	 - I.
	 ·
	- 1

TECHNOLOGY



SIZES RUBAN SHIELDWALL



SIZES RUBAN WIRE



SIZES eRUBAN



Ruban								
	PureGrip (Compound	l - ShieldWall System	า - 3/180 TPI	3/180 TPI E2			TR
	Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
	0150574	54-584	27.5 x 2.10	foldable	655	58	4 019238 056358	40,95
	0150575	58-584	27.5 x 2.30	foldable	800	55	4 019238 056280	40,95
	0150576	65-584	27.5 x 2.60	foldable	875	43	4 019238 056297	45,95
	0150577	54-622	29 x 2.10	foldable	695	58	4 019238 056303	40,95
	0150578	58-622	29 x 2.30	foldable	845	55	4 019238 056310	40,95
	0150579	65-622	29 x 2.60	foldable	925	43	4 019238 056327	45,95



KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.



Specifically designed for the use on electrified bikes





e	Ru	ba	nF	Ρι	IS

	 L
- 1-	 л.

TECHNOLOGY



SIZES RUBAN SHIELDWALL



SIZES RUBAN WIRE



SIZES eRUBAN



Ruban								
Wire - 3/18	BO TPI						E25	
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€	
0150534	54-584	27.5 x 2.10	Wire	660	58	4 019238 048568	28,95	
0150535	54-584	27.5 x 2.10	Wire refl.	665	58	4 019238 048551	33,95	
0150536	58-584	27.5 x 2.30	Wire	780	55	4 019238 048582	28,95	
0150537	58-584	27.5 x 2.30	Wire refl.	805	55	4 019238 048575	33,95	
0150538	65-584	27.5 x 2.60	Wire	870	43	4 019238 048605	33,95	
0150539	65-584	27.5 x 2.60	Wire refl.	875	43	4 019238 048599	38,95	
0150540	54-622	29 x 2.10	Wire	700	58	4 019238 048629	28,95	
0150541	54-622	29 x 2.10	Wire refl.	710	58	4 019238 048612	33,95	
0150545	58-622	29 x 2.30	Wire	845	55	4 019238 048643	28,95	
0150546	58-622	29 x 2.30	Wire refl.	855	55	4 019238 048636	33,95	
0150547	65-622	29 x 2.60	Wire	920	43	4 019238 048667	33,95	
0150548	65-622	29 x 2.60	Wire refl.	930	43	4 019238 048650	38,95	





Specifically designed for the use on electrified bikes



- E	_

TECHNOLOGY



SIZES RUBAN SHIELDWALL



SIZES RUBAN WIRE



SIZES eRUBAN

	-				
D)		n	D)	П	
					\geq

	PureGrip (Compound	- PolyX Breaker™ - V	Wire - 3/180 TPI				E50
	Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
	0150723	62-406	20 x 2.4	 Wire 	630	58	4 019238 097962	35,95
	0150722	62-406	20 x 2.4	Wire refl.	635	58	4 019238 097979	40,95
	0150550	58-559	26 x 2.30	• Wire	800	55	4 019238 048919	37,95
	0150555	58-559	26 x 2.30	Wire refl.	810	55	4 019238 048865	42,95
	0150549	58-584	27.5 x 2.30	 Wire 	841	55	4 019238 048926	37,95
	0150556	58-584	27.5 x 2.30	Wire refl.	850	55	4 019238 048858	42,95
	0150551	65-584	27.5 x 2.60	 Wire 	920	43	4 019238 048902	42,95
	0150557	65-584	27.5 x 2.60	Wire refl.	930	43	4 019238 048841	47,95
	0150552	54-622	29 x 2.10	 Wire 	740	58	4 019238 048896	37,95
	0150558	54-622	29 x 2.10	Wire refl.	750	58	4 019238 048834	42,95
	0150553	58-622	29 x 2.30	• Wire	890	55	4 019238 048889	37,95
	0150559	58-622	29 x 2.30	Wire refl.	900	55	4 019238 048827	42,95
	0150560	65-622	29 x 2.60	• Wire	985	43	4 019238 048872	42,95
	0150554	65-622	29 x 2.60	Wire refl.	980	43	4 019238 048810	47,95





Specifically designed for the use on electrified bikes



Speed King

TECHNOLOGY



SIZES





Speed King

—	

TECHNOLOGY



SIZES

THE TIRE FOR DIRT JUMPERS AND PUMP TRACKS


The Speed King features a meticulously crafted tread pattern that delivers grip and control on dirt tracks and ramps. With RaceSport construction, it offers the perfect balance of strength, durability, and weight, so you can land every trick and hit every corner with confidence. Whether you're launching off a jump or speeding down a slope, the Speed King reigns supreme.

BLACKCH

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.



Developed together with professional mountain bikers, the **RaceSport** carcass unites light-weight construction with noticeably improved puncture protection for the perfect competition choice. Light: contains a particularly fine, flexible nylon fabric with an elaborately produced protective rubber coating. Fast and reliable: World Cup quality, low rolling resistance and puncture protection. Combined with our legendary BlackChili Compound, the right combination for XC and Marathon racing.



Speed King

Г	

TECHNOLOGY

Speed k	King						
BlackChili	Compoun	d - RaceSport - 3/1	180 TPI				
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0100728	55-559	26 x 2.20	foldable	420	65	4 019238 586282	59,95







<

Double **Fighter III**

_	 _

TECHNOLOGY



SIZES





<

Double **Fighter III**

			-	
		-		
•				

TECHNOLOGY




SIZES

AN URBAN ADVENTURER WITH REAL VERSATILITY

Light rolling and quiet on tarmac, yet grips on tracks and gravel roads.

Double Fighter III

	Wire - 3/18	30 TPI						
	Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
	0101232	47-305	16 x 1.75	Wire	380	65	4 019238 709810	14,95
-	0101282	47-305	16 x 1.75	Wire refl.	380	65	4 019238 732429	17,95
-	0101233	47-406	20 x 1.75	 Wire 	520	65	4 019238 709827	14,95
-	0101283	47-406	20 x 1.75	Wire refl.	520	65	4 019238 732412	17,95
	0101234	47-507	24 x 1.75	Wire	620	65	4 019238 709834	17,95
	0101284	47-507	24 x 1.75	Wire refl.	620	65	4 019238 732405	21,95
	0101251	50-507	24 x 2.0	Wire	650	65	4 019238 721126	17,95
-	0101285	50-507	24 x 2.0	Wire refl.	650	65	4 019238 732399	21,95
	0101235	50-559	26 x 1.90	Wire	790	65	4 019238 709858	22,95
	0101286	50-559	26 x 1.90	Wire refl.	790	65	4 019238 732382	25,95
	0101237	50-584	27.5 x 2.00	Wire	860	65	4 019238 709872	22,95
	0101287	50-584	27.5 x 2.00	Wire refl.	860	65	4 019238 732375	25,95
	0100795	37-622	700 x 35C	 Wire 	550	87	4 019238 601671	22,95
	0101289	37-622	700 x 35C	Wire refl.	550	87	4 019238 732436	25,95
	0101239	50-622	29 x 2.00	 Wire 	915	65	4 019238 709896	22,95
	0101292	50-622	29 x 2.00	Wire refl.	915	65	4 019238 732368	25,95

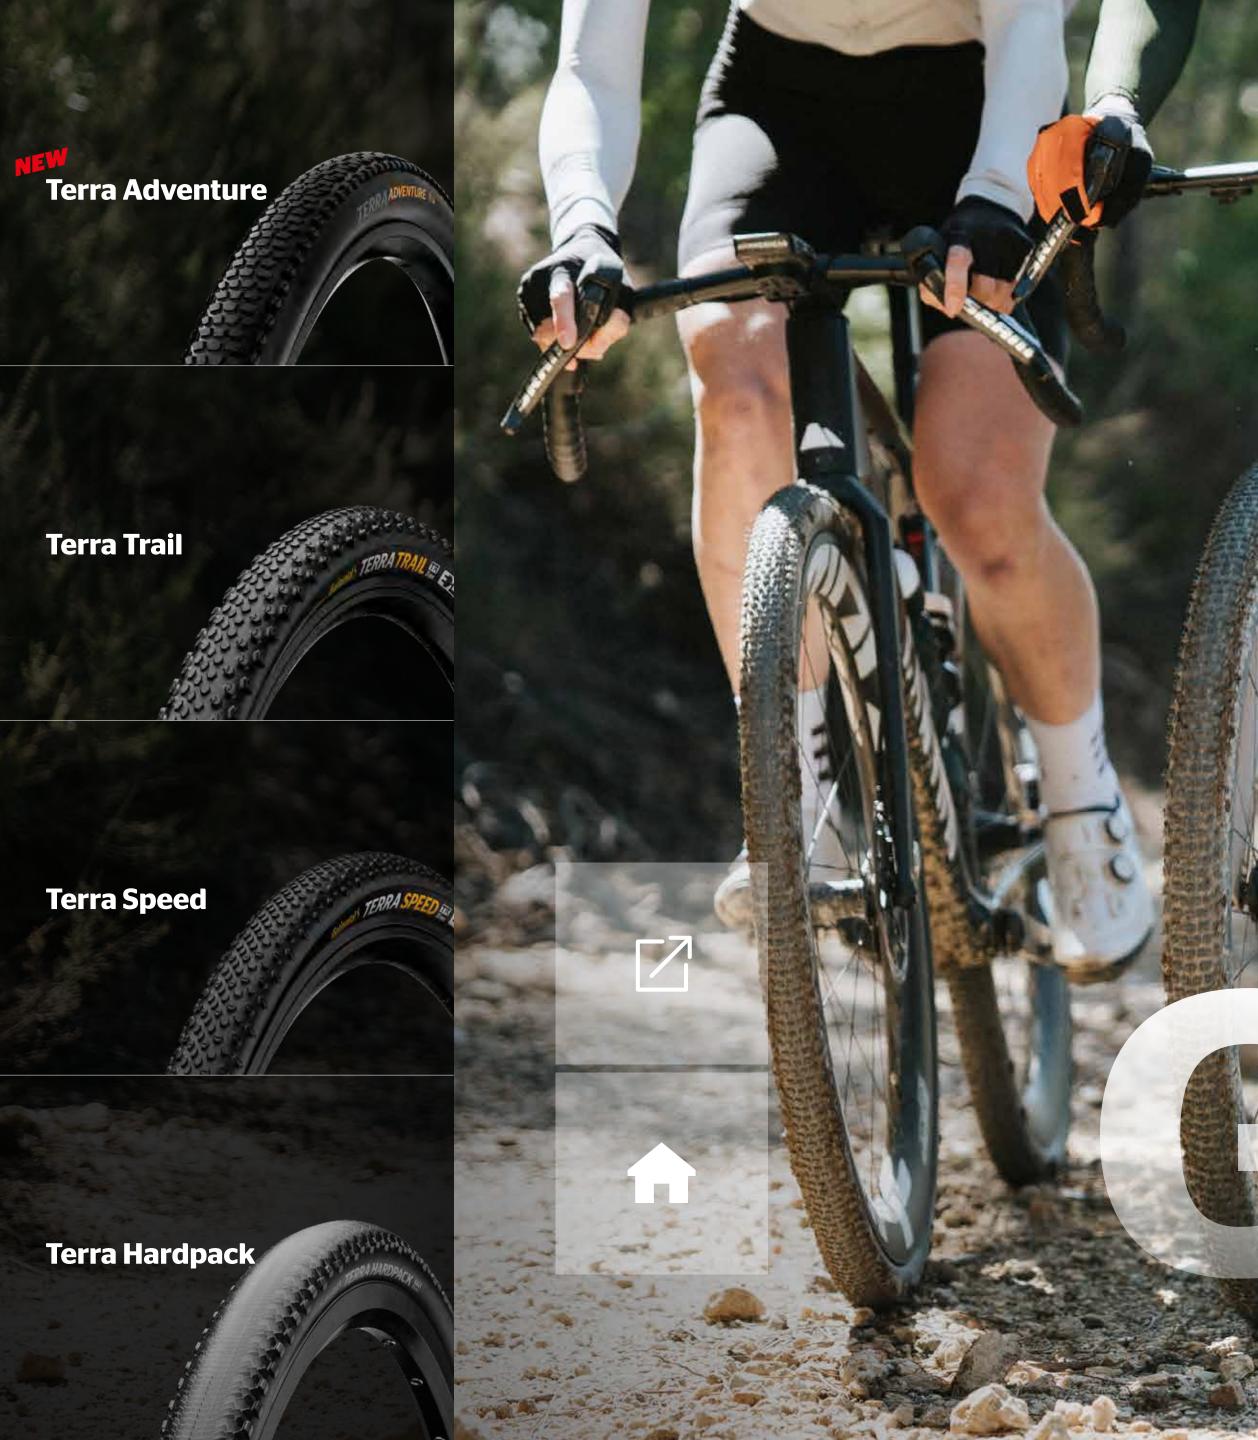







Terra Adventure

- 1		
- 1		
- 1		
- 1		
- 1		

TECHNOLOGY



SIZES





Terra Adventure

TECHNOLOGY




SIZES

ENGINEERED FOR THE UNKOWN

Your gateway to the uncharted. Optimized for diverse terrains, it excels from soft to hardpack. With widths up to 55 mm Terra Adventure merges Gravel and MTB performance seamlessly. Embrace the freedom of the outdoors with a tire designed for the adventurer in you.

TERRAIN







CASING



Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.

COMPOUND



Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.



GRAVEL

<

Terra Adventure

	- 1	
	-	
	- 1	


TECHNOLOGY

Terra A	dventur	'e					
Trail Grip -	- 3/330 TPI					E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150748	45-622	28 X 1.75	foldable	540	65	4 019238 401639	61,95
0150749	45-622	28 X 1.75	foldable	540	65	4 019238 401615	61,95
0150750	50-622	28 X 2.00	foldable	610	58	4 019238 401592	61,95
0150753	50-622	28 X 2.00	foldable	625	58	4 019238 401578	61,95
0150754	55-622	29 X 2.20	foldable	745	50	4 019238 401554	61,95
0150755	55-622	29 X 2.20	foldable	735	50	4 019238 401530	61,95





SIZES




KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.







Terra Trail



TECHNOLOGY




SIZES PROTECTION



SIZES SHIELDWALL

T





Terra Trail

l
 I
I
\equiv

TECHNOLOGY



SIZES PROTECTION



SIZES SHIELDWALL

CHOOSE ALTER ROAD, CHOOSE TERRA

For your way off-road. For more comfort. For the adventure. Be it the long tour, or the shortcut on your way home. Made to get you over rough and smooth.



With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.




The extra all-round puncture protection layer renders the casings extremely durable and resistant to damage or penetration from foreign elements. Treads and sidewalls are equally protected, and are 25% lighter and offer 30% more puncture protection than their predecessors protected by DuraSkin®. Rolling resistance and absorption has also significantly improved. The new Revolution Tubeless Ready Bead improves the installation of Tubeless Ready Tires. For tubeless sealing we recommend the use of Continental RevoSealant.




PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.



The ShieldWall System combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.





Terra Trail

	ъ
	L
	L
	н
	н

TECHNOLOGY



SIZES PROTECTION

Terra Trail								
	BlackChili Compound - ProTection - 3/180 TPI							
	Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
	0101715	40-584	650 X 40B	foldable	425	72	4 019238 029673	66,95
	0101716	40-584	650 X 40B	foldable	425	72	4 019238 029659	66,95
	0101944	40-584	650 X 40B	foldable	445	72	4 019238 064544	66,95
	0101697	40-622	700 X 40C	foldable	445	72	4 019238 027075	66,95
	0101701	40-622	700 X 40C	foldable	445	72	4 019238 027044	66,95
	0101836	40-622	700 X 40C	foldable	460	72	4 019238 052060	66,95
					Contraction of the second second			







SIZES SHIELDWALL




KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.





Terra Trail

— I	

TECHNOLOGY



SIZES PROTECTION

Terra Tr	Terra Trail							
PureGrip Compound - ShieldWall System - 3/180 TPI								
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€	
0150509	47-584	650 X 47B	foldable	480	65	4 019238 038507	40,95	
0150508	47-584	650 X 47B	foldable	490	65	4 019238 038538	40,95	
0150503	35-622	700 X 35C	foldable	390	72	4 019238 038460	40,95	
0150505	35-622	700 X 35C	foldable	410	72	4 019238 038491	40,95	
0150507	40-622	700 X 40C	foldable	455	72	4 019238 038545	40,95	
0150673	40-622	700 X 40C	foldable	445	72	4 019238 064506	40,95	
0150675	45-622	700 X 45C	foldable	495	65	4 019238 064476	40,95	
0150674	45-622	700 X 45C	foldable	520	65	4 019238 064483	40,95	





SIZES SHIELDWALL

STREET		
OFFROAD / BIKEPACKING		

Tire Range 2025/26	continental-tires.com/bicycle	Continental Reifen Deutschland GmbH
--------------------	-------------------------------	-------------------------------------


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.







Terra Speed

TECHNOLOGY



SIZES





Terra Speed

GRAVEI

TECHNOLOGY



SIZES

CHOOSE ALTER ROAD, CHOOSE TERRA


For your way off-road. For more comfort. For the adventure. Be it the long tour, or the shortcut on your way home. Made to get you over rough and smooth.



With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.



The extra all-round puncture protection layer renders the casings extremely durable and resistant to damage or penetration from foreign elements. Treads and sidewalls are equally protected, and are 25% lighter and offer 30% more puncture protection than their predecessors protected by DuraSkin[®]. Rolling resistance and absorption has also significantly improved. The new Revolution Tubeless Ready Bead improves the installation of Tubeless Ready Tires. For tubeless sealing we recommend the use of Continental RevoSealant.



Terra Speed

GRAVEL

<

Г	
- L.	

TECHNOLOGY



SIZES

Terra Speed								
BlackChili	BlackChili Compound - ProTection - 3/180 TPI							
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€	
0101719	35-584	650 X 35B	foldable	405	72	4 019238 029796	66,95	
0101720	35-584	650 X 35B	foldable	405	72	4 019238 029772	66,95	
0101717	40-584	650 X 40B	foldable	450	72	4 019238 029635	66,95	
0101718	40-584	650 X 40B	foldable	445	72	4 019238 029611	66,95	
0101693	35-622	700 X 35C	foldable	430	72	4 019238 027013	66,95	
0101700	35-622	700 X 35C	foldable	420	72	4 019238 026955	66,95	
0101694	40-622	700 X 40C	foldable	465	72	4 019238 027099	66,95	
0101702	40-622	700 X 40C	foldable	465	72	4 019238 027020	66,95	
0101837	40-622	700 X 40C	foldable	480	72	4 019238 052053	66,95	
0102016	45-622	700 X 45C	foldable	535	65	4 019238 093094	66,95	
0102007	45-622	700 X 45C	foldable	535	65	4 019238 083439	66,95	





STREET		
OFFROAD / BIKEPACKING		

Tire Range 2025/26	continental-tires.com/bicycle	Continental Reifen Deutschland GmbH
--------------------	-------------------------------	-------------------------------------


CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.







Terra Hardpack

- F	
- 1	
- 1	
- 1	
- 1	
- 1	

TECHNOLOGY



SIZES





Terra Hardpack

GRAVEI

TECHNOLOGY



SIZES

CHOOSE ALTER ROAD, CHOOSE TERRA


For your way off-road. For more comfort. For the adventure. Be it the long tour, or the shortcut on your way home. Made to get you over rough and smooth.

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.



The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.



Terra Hardpack

GRAVEL

<

	 .	
1.	 _	

TECHNOLOGY

Terra Ha	ardpack						
PureGrip (Compound	- ShieldWall System	- 3/180 TPI			E25	TR
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150563	50-584	650 X 50B	foldable	535	65	4 019238 052114	40,95
0150565	50-622	700 X 50C	foldable	565	65	4 019238 052107	40,95







SIZES

R

STREET		
OFFROAD / BIKEPACKING		


KNOWLEDGE CONTI

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.







Pure CONTACT

	_	_
	-	
	-	
	-	
- 1		 _

TECHNOLOGY




SIZES



FEATURES



SUSTAINABILITY

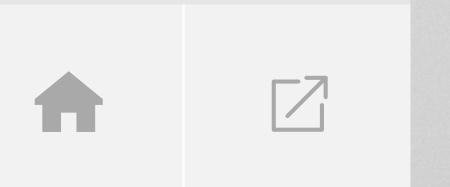



Pure CONTACT < **TECHNOLOGY SIZES FEATURES** SUSTAINABILITY

PURE CONTACT. BUILT TOUGH TO RIDE SMOOTH.

Created for urban riders who want confidence to commute, shop, and explore. A cutting-edge combination of Vectran and PolyX breaker technologies take protection to a whole new level, alongside more sustainable manufacturing using responsibly sourced rubber and more natural materials.


Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.




With **PolyX Breaker™** car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.









Pure CONTACT

TECHNOLOGY



SIZES



FEATURES



SUSTAINABILITY



Pure	CO	N	TA	СТ

	Vectran B	reaker - Po	olyX Breaker - 3/1	80 TPI				GRX E50	08
-	Article	ETRTO	Dimension	Color/sidewall	g	PSI	kg+	EAN	RRP/€
	0101949	47-622	28 x 1.75	foldable refl.	670	72	115	4019238065022	61,95
	0101967	50-584	27.5 x 2.00	foldable refl.	665	65	125	4019238072419	61,95
	0101968	55-584	27.5 x 2.20	foldable refl.	770	58	125	4019238072426	61,95
	0101969	60-584	27.5 x 2.40	foldable refl.	850	50	121	4019238072433	61,95
	0101970	40-622	28 x 1.50	foldable refl.	585	72	115	4019238072402	61,95
	0101971	50-622	28 x 2.00	foldable refl.	735	65	128	4019238072488	61,95
	0101972	55-622	28 x 2.20	foldable refl.	800	58	132	4019238072495	61,95
	0101982	50-584	27.5 x 2.00	foldable refl.	615	65	125	4019238074017	63,95
	0101983	55-584	27.5 x 2.20	foldable refl.	715	58	125	4019238074000	63,95
	0101984	60-584	27.5 x 2.40	foldable refl.	795	50	121	4019238073997	63,95
	0101985	40-622	28 x 1.50	foldable refl.	545	72	115	4019238073980	63,95
	0101986	47-622	28 x 1.75	foldable refl.	625	72	115	4019238073973	63,95
	0101987	50-622	28 x 2.00	foldable refl.	685	65	128	4019238073966	63,95
	0101988	55-622	28 x 2.20	foldable refl.	745	58	132	4019238073959	63,95
/									



SAFETY LEVEL



Û

1

2

08

Puncture Protection Level 8:

Vectran Breaker, our high-quality racing tire technology, meets PolyX Breaker technology, which has proven to be extremely effective in car tires for years. The combination provides the **best puncture protection** in our Range.



Specifically designed for the use on electrified bikes







Pure CONTACT



TECHNOLOGY




SIZES



FEATURES



SUSTAINABILITY





Safety Level 8



Outstanding grip (wet and dry)



Pure CONTACT

	1

TECHNOLOGY

Ŀ		
Ŀ	++++	
Ŀ		l
Ŀ		l


SIZES



FEATURES



SUSTAINABILITY




Our path to sustainability:

created from one-third sustainable materials - silicate from the ash of rice husks, responsibly sourced natural rubber and renewable softener, engineered into one of our high performing tires.



Silicate from the Ash of Rice Husks

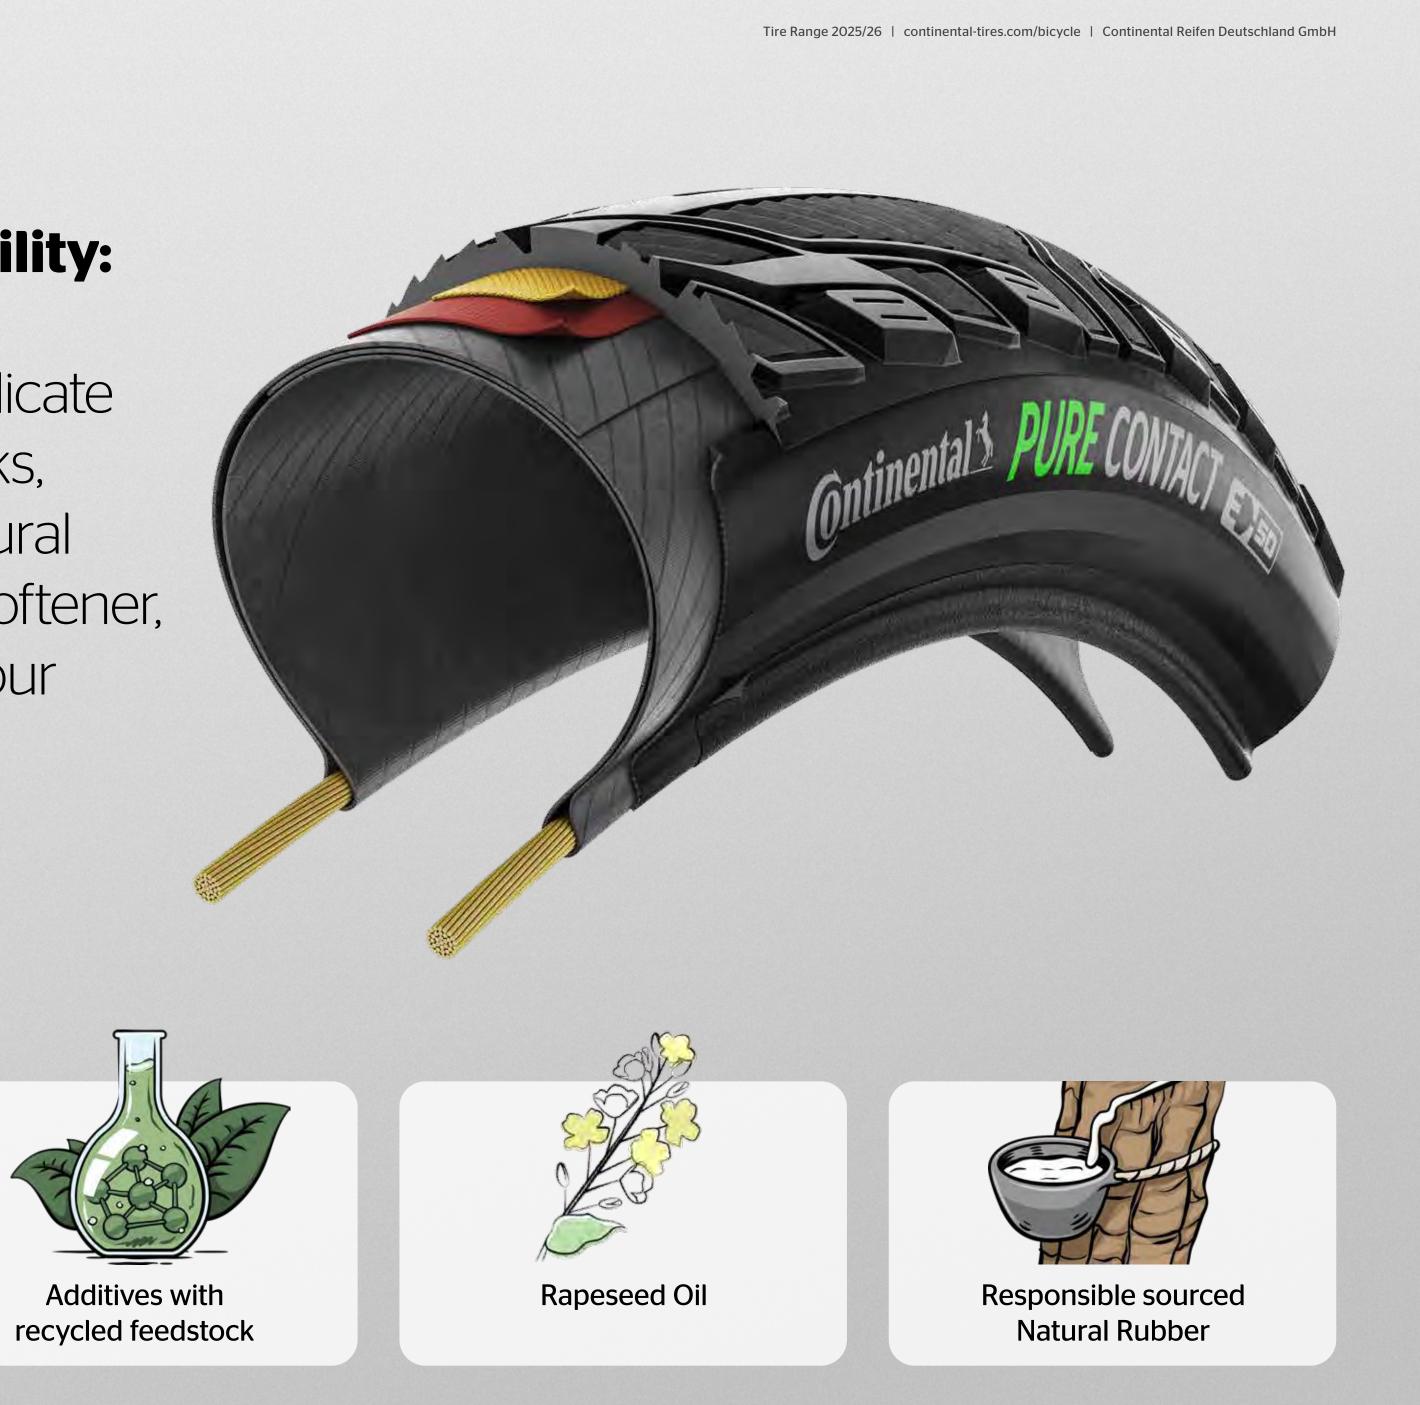

eCONTACT Plus



TECHNOLOGY



SIZES



FEATURES





eCONTACT Plus

Г	
н	
н	
н	

TECHNOLOGY

L		
L		
L	++++-	
L	++++	
Ŀ		

SIZES



FEATURES


THE ULTIMATE IN CONFIDENCE AND COMFORT

Specifically developed for the commuting and load-carrying demands of e-bikes. This high-mileage tire features a compact tread pattern to keep rolling resistance low, boosting the range of each battery charge.

Safety **G** Pro

Engineered for the unique demands of modern e-bikes and cargo bikes up to 50km/h. Our SafetyPlus Pro Breaker technology combines highly flexible rubber with the proven strength of our tightly woven PolyX puncture-resistant fibers. The high elasticity keeps rolling resistance low, prolonging the e-bike battery life so you get moremiles from each charge. When riding with heavy loads, the SafetyPlus Pro Breaker contributes to confident handling through busy traffic and sharp corners, no matter the conditions.





eCONTACT Plus

Г	

TECHNOLOGY



SIZES



FEATURES


 \square

eCONTACT Plus

SafetyPlus	SafetyPlus Pro Breaker - 3/180 TPI - 🕞							
Article	ETRTO	Dimension	Color/sidewall	g	PSI	kg+	EAN	RRP/€
0101973	50-406	20 x 2.00	Wire refl.	750	72	85	4 019238 073171	50,95
0101974	55-406	20 x 2.20	Wire refl.	770	72	95	4 019238 073164	50,95
0101975	62-406	20 x 2.50	Wire refl.	835	58	115	4 019238 073157	50,95
0101976	55-559	26 x 2.20	Wire refl.	1100	65	128	4 019238 073140	50,95
0101977	55-584	27.5 x 2.20	Wire refl.	1200	65	128	4 019238 073133	50,95
0101978	62-584	27.5 x 2.50	Wire refl.	1220	65	128	4 019238 073126	50,95
0101979	50-622	28 x 2.00	Wire refl.	1095	72	121	4 019238 073119	50,95
0101980	55-622	28 x 2.20	Wire refl.	1150	65	128	4 019238 073102	50,95
0101981	62-622	28 x 2.50	Wire refl.	1390	58	128	4 019238 073096	50,95



Ū





Specifically designed for the use on electrified bikes



eCONTACT Plus



TECHNOLOGY




SIZES



FEATURES



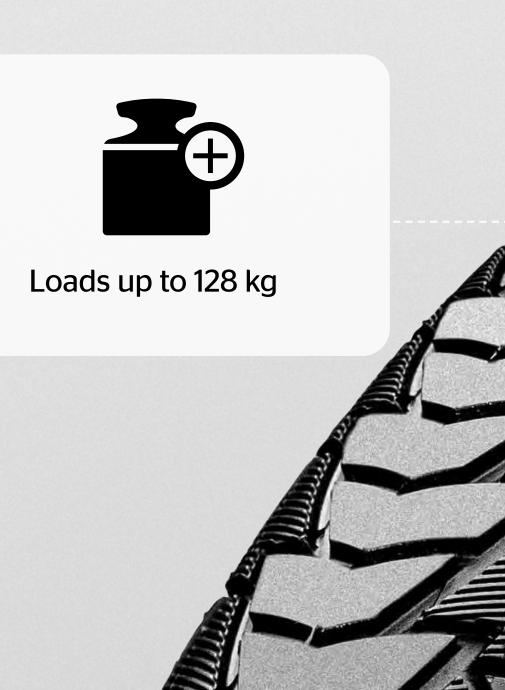



High mileage




CONTACT Plus

- 1		
- 1		
- 1		

TECHNOLOGY



SIZES





CONTACT Plus

URBAN

<

TECHNOLOGY



SIZES


ALL YOU WOULD EXPECT

An allrounder on any type of roads and paths that enhances every bike. Thanks to the plus in puncture protection, nobody will be left behind with a flat tire. ECE-R75-certified, designated for usage on e-bikes up to 50 km/h.

Safety (+)

Specially designed for e-bikes up to 50 km/h, we have combined our **SafetySystem Breaker** with a highly flexible natural rubber. The result is an extremely cut and puncture resistant breaker ply which has a low rolling resistance thanks to its high elasticity. This helps saving battery life and the environment. High acceleration torques and fast speeds in turns are easily absorbed by the breaker. The specialist for fast e-bikes and rental bikes.





CONTACT Plus

URBAN

<

Г	
1.	 _

TECHNOLOGY



SIZES

CONTACT Plus

	SafetyPlus Breaker - 3/180 TPI - 🕞								V 7
	Article	ETRTO	Dimension	Color/sidewall	g	PSI	kg+	EAN	RRP/€
	0101001	47-507	24 x 1.75	Wire refl.	940	58	90	4 019238 639971	45,95
	0101002	47-559	26 x 1.75	Wire refl.	1040	58	109	4 019238 639964	45,95
	0101221	42-584	27.5 x 1½	Wire refl.	990	65	100	4 019238 698138	45,95
	0101003	28-622	28 x 1% x 11/8	Wire refl.	645	101	85	4 019238 639957	45,95
	0101004	32-622	28 x 1¾ x 15⁄8	Wire refl.	750	87	90	4 019238 639940	45,95
	0101005	37-622	28 x 1¼ x 1¾	Wire refl.	980	87	100	4 019238 639933	45,95
	0101816	40-622	28 x 1.50	Wire refl.	1025	94	100	4 019238 043396	45,95
	0101006	42-622	28 x 1.60	Wire refl.	1050	72	100	4 019238 639926	45,95
	0101007	47-622	28 x 1.75	Wire refl.	1150	58	95	4 019238 639988	45,95
	0101008	42-635	28 x 1½	Wire refl.	1070	65	100	4 019238 639995	45,95



CONTACT Plus City

_			
- Г	_	_	
- 1			
- 1			
- 1		_	
- 1.			

TECHNOLOGY



SIZES





CONTACT Plus City

TECHNOLOGY



SIZES


OUT AND ABOUT IN TOWN

Exactly the right tire to explore the city securely and relaxed thanks to a tread pattern made for tarmac, efficient rolling characteristics, and a maximum of puncture protection. With its ECE-R75-certification, cyclists can ride economically and save energy even on e-bikes up to 50 km/h.

Safety (+)

Specially designed for e-bikes up to 50 km/h, we have combined our **SafetySystem Breaker** with a highly flexible natural rubber. The result is an extremely cut and puncture resistant breaker ply which has a low rolling resistance thanks to its high elasticity. This helps saving battery life and the environment. High acceleration torques and fast speeds in turns are easily absorbed by the breaker. The specialist for fast e-bikes and rental bikes.





CONTACT Plus City

Г	 1

TECHNOLOGY

CONTACT Plus Citv

CONTACT Flus City								
SafetyPlus Breaker - 3/180 TPI - 🔎								Û7
Article	ETRTO	Dimension	Color/sidewall	g	PSI	kg+	EAN	RRP/€
0101331	47-559	26 x 1.75	Wire refl.	1000	58	109	4 019238 760934	45,95
0101334	55-559	26 x 2.20	Wire refl.	1230	58	121	4 019238 760996	45,95
0101335	55-584	27.5 x 2.20	Wire refl.	1270	58	128	4 019238 761009	45,95
0101336	37-622	28 x 1¾ x 15⁄8	Wire refl.	900	87	95	4 019238 760873	45,95
0101340	42-622	28 x 1.60	Wire refl.	990	72	100	4 019238 760903	45,95
0101343	47-622	28 x 1.75	Wire refl.	1130	58	95	4 019238 760965	45,95





SIZES



CONTACT

_	_
- E	1
- L.	

TECHNOLOGY



SIZES





CONTACT

URBAN

<

\equiv	
—	

TECHNOLOGY



SIZES


WHEN THINGS GET TOUGH

Versatile allrounder which connects reliably to every surface. Equipped with the most popular tread pattern from the urban/tour range, especially designed for a high degree of safety thanks to its lamellar structure.

Safety **O** System

The SafetySystem Breaker consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.





CONTACT

Г	

TECHNOLOGY



SIZES

CONTACT

em Breake	er - 3/180 TPI - 🗇				E25	Ů4
ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
37-406	20 x 1.40	Wire.	420	72	4 019238 760286	18,95
37-406	20 x 1.40	Wire refl.	420	72	4 019238 760279	20,95
47-406	20 x 1.75	 Wire 	505	58	4 019238 761283	18,95
47-406	20 x 1.75	Wire refl.	505	58	4 019238 761276	20,95
47-559	26 x 1.75	 Wire 	670	58	4 019238 761306	31,95
47-559	26 x 1.75	Wire refl.	670	58	4 019238 761290	35,95
28-622	28 x 1% x 1%	 Wire 	480	101	4 019238 761375	31,95
28-622	28 x 1% x 1%	Wire refl.	480	101	4 019238 761368	35,95
32-622	28 x 1¼ x 1¾	 Wire 	495	87	4 019238 761320	31,95
32-622	28 x 1¼ x 1¾	Wire refl.	495	87	4 019238 761313	35,95
37-622	28 x 1¾ x 15⁄8	 Wire 	610	87	4 019238 761344	31,95
37-622	28 x 1¾ x 15⁄8	Wire refl.	610	87	4 019238 761351	35,95
42-622	28 x 1.60	Wire	645	87	4 019238 761382	31,95
42-622	28 x 1.60	Wire refl.	645	87	4 019238 761399	35,95
47-622	28 x 1.75	 Wire 	770	58	4 019238 761429	31,95
47-622	28 x 1.75	Wire refl.	770	58	4 019238 761412	35,95
	ETRTO 37-406 37-406 47-406 47-406 47-559 47-559 28-622 32-622 32-622 37-622 37-622 42-622 47-622	$37-406$ 20×1.40 $37-406$ 20×1.40 $47-406$ 20×1.75 $47-406$ 20×1.75 $47-559$ 26×1.75 $47-559$ 26×1.75 $28-622$ $28 \times 1\% \times 1\%$ $28-622$ $28 \times 1\% \times 1\%$ $32-622$ $28 \times 1\% \times 1\%$ $37-622$ $28 \times 1\% \times 1\%$ $37-622$ $28 \times 1\% \times 1\%$ $42-622$ 28×1.60 $42-622$ 28×1.75	ETRTODimensionColor/sidewall37-40620 x 1.40Wire.37-40620 x 1.40Wire refl.47-40620 x 1.75Wire47-40620 x 1.75Wire refl.47-59926 x 1.75Wire47-55926 x 1.75Wire refl.28-62228 x 1½ x 1½Wire28-62228 x 1½ x 1½Wire refl.32-62228 x 1½ x 1½Wire32-62228 x 1½ x 1½Wire refl.37-62228 x 1½ x 1½Wire refl.37-62228 x 1½ x 1½Wire42-62228 x 1.60Wire42-62228 x 1.60Wire47-62228 x 1.75Wire	ETRTODimensionColor/sidewallg37-40620 x 1.40Wire.42037-40620 x 1.40Wire refl.42047-40620 x 1.75Wire50547-40620 x 1.75Wire refl.50547-55926 x 1.75Wire refl.67047-55926 x 1.75Wire refl.67028-62228 x 1% x 1%Wire refl.48028-62228 x 1% x 1%Wire refl.49532-62228 x 1% x 1%Wire refl.49537-62228 x 1% x 1%Wire refl.61037-62228 x 1% x 1%Wire refl.61037-62228 x 1% x 1%Wire refl.61042-62228 x 1.60Wire refl.64542-62228 x 1.60Wire refl.64547-62228 x 1.75Wire refl.770	ETRTO Dimension Color/sidewall g PSI 37-406 20 x 1.40 • Wire. 420 72 37-406 20 x 1.40 • Wire refl. 420 72 47-406 20 x 1.75 • Wire 505 58 47-406 20 x 1.75 • Wire refl. 505 58 47-559 26 x 1.75 • Wire refl. 670 58 47-559 26 x 1.75 • Wire refl. 670 58 28-622 28 x 1½ x 1½ • Wire refl. 480 101 28-622 28 x 1½ x 1½ • Wire refl. 495 87 32-622 28 x 1¼ x 1¾ • Wire refl. 495 87 32-622 28 x 1¼ x 1¾ • Wire refl. 495 87 32-622 28 x 1¼ x 1¾ • Wire refl. 495 87 37-622 28 x 1½ x 1½ • Wire refl. 610 87 37-622 28 x 1.60 • Wire refl. 610 87 42-622 28 x 1.60	ETRTODimensionColor/sidewallgPSIEAN37-40620 x 1.40Wire.420724 019238 76028637-40620 x 1.40Wire refl.420724 019238 76027947-40620 x 1.75Wire505584 019238 76128347-40620 x 1.75Wire refl.505584 019238 76128647-55926 x 1.75Wire refl.670584 019238 76129028-62228 x 1% x 1%Wire refl.670584 019238 76137528-62228 x 1% x 1%Wire refl.4801014 019238 76136832-62228 x 1% x 1%Wire refl.495874 019238 76136832-62228 x 1% x 1%Wire refl.495874 019238 76131337-62228 x 1% x 1%Wire refl.610874 019238 76134437-62228 x 1.60Wire refl.610874 019238 76138242-62228 x 1.60Wire refl.645874 019238 76139947-62228 x 1.75Wire645874 019238 761399





URBAN

<

 SAFETY LEVEL
 Image: 1 mining the second second

CONTACT Urban




TECHNOLOGY



SIZES 35-349 - 62-584



SIZES 28-622 - 62-622





CONTACT Urban

Г		1
н		
н		
н		
н	<u> </u>	I
		J

TECHNOLOGY

Г	
	≠‡‡
L	

SIZES 35-349 - 62-584



SIZES 28-622 - 62-622

CYCLING ON THE CITY PULSE

Premium mobility for design enthusiasts. Urban tread pattern packed with the latest technology. The perfect symbiosis between light-rolling and puncture protection reflected in this specialized tire designed for the city jungle.


PURE GRIP COMPOUND


PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

Safety 🕑 Pro

The SafetyPro Breaker is designed from nylon textile. Crosswoven textile fiber netting that is simultaneously robust and flexible. Maximum puncture protection with minimal added weight. The risk of punctures resulting from glass or sharp stones is substantially reduced.

E ,50





CONTACT Urban

TECHNOLOGY



SIZES 35-349 - 62-584



SIZES 28-622 - 62-622

CONTACT Urban

PureGrip	PureGrip Compound - SafetyPro - 3/180 TPI							
Article	ETRTO	Dimension	Color/sidewall	g	PSI	kg+	EAN	RRP/€
0150681	35-349	16 x 1.35	foldable refl.	225	116	71	4 019238 065886	50,95
0150567	35-349	16 x 1.35	Wire refl.	265	116	71	4 019238 052749	40,95
0150648	35-349	16 x 1.35	foldable	220	116	71	4 019238 063882	45,95
0150649	35-349	16 x 1.35	foldable	220	116	71	4 019238 063875	45,95
0150365	32-406	20 x 1.25	Wire refl.	295	101	71	4 019238 023152	35,95
0150352	42-406	20 x 1.60	Wire refl.	360	87	75	4 019238 021868	35,95
0150354	50-406	20 x 2.00	Wire refl.	430	72	80	4 019238 021912	35,95
0150366	47-559	26 x 1.75	Wire refl.	565	72	112	4 019238 023145	35,95
0150355	50-559	26 x 2.00	Wire refl.	585	72	121	4 019238 021929	35,95
0150367	55-559	26 x 2.20	Wire refl.	665	65	132	4 019238 023138	35,95
0150353	42-584	27.5 x 1.60	Wire refl.	515	94	106	4 019238 021936	35,95
0150357	50-584	27.5 x 2.00	Wire refl.	620	72	121	4 019238 021943	35,95
0150368	55-584	27.5 x 2.20	Wire refl.	695	65	132	4 019238 023121	35,95
0150658	62-584	27.5 x 2.50	Wire refl.	750	58	132	4 019238 063912	35,95



3 4 5 6 7

CONTACT Urban

TECHNOLOGY



SIZES 35-349 - 62-584




SIZES 28-622 - 62-622

CO				
			IJG	

CONTAG								
PureGrip (Compound	- SafetyPro - 3/18	80 TPI				E50	U 6
Article	ETRTO	Dimension	Color/sidewall	g	PSI	kg+	EAN	RRP/€
0150369	28-622	28 x 1% x 1%	Wire refl.	400	108	85	4 019238 023114	35,95
0150370	32-622	28 x 1¼ x 1¾	Wire refl.	450	94	90	4 019238 023107	35,95
0150371	35-622	28 x 1¾ x 1%	Wire refl.	470	94	95	4 019238 023091	35,95
0150350	37-622	28 x 1¾ x 1%	Wire refl.	490	94	100	4 019238 021875	35,95
0150351	40-622	28 x 1.50	Wire refl.	545	94	100	4 019238 021882	35,95
0150349	42-622	28 x 1.60	Wire refl.	545	87	106	4 019238 021899	35,95
0150372	47-622	28 x 1.75	Wire refl.	625	72	115	4 019238 023084	35,95
0150358	50-622	28 x 2.00	Wire refl.	655	72	121	4 019238 021950	35,95
0150373	55-622	28 x 2.20	Wire refl.	740	65	132	4 019238 023077	35,95
0150656	62-622	28 x 2.50	Wire refl.	795	58	132	4 019238 063936	35,95





Safety O Pro E 30

CONTACT Speed



TECHNOLOGY



SIZES WIRE



SIZES WIRE REFLEX





CONTACT Speed

Г	1
	J

	1
TECHNOLOGY	

SIZES WIRE



SIZES WIRE REFLEX


UNITES SPEED AND COMFORT IN ONE TIRE

The perfect choice for the city speedsters, single-speed bikes and fitness bikes. With its double layer of fabric breaker, the light-weight design and its roughened slick tread it shines especially on tarmac.

Safety **O** System

The SafetySystem Breaker consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.





CONTACT Speed

TECHNOLOGY



SIZES WIRE



SIZES WIRE REFLEX

CONTACT Speed

CONTA	ci Spee						
SafetySyst	tem Breake	er - 3/180 TPI - 🕩				E25	04
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101387	28-406	20 x 1.10	 Wire 	265	87	4 019238 774665	21,95
0101389	32-559	26 x 1.30	• Wire	430	87	4 019238 774658	31,95
0101393	42-559	26 x 1.60	• Wire	540	87	4 019238 774641	31,95
0101395	50-559	26 x 2.00	 Wire 	665	58	4 019238 774634	31,95
0101397	32-584	27.5 x 1.25	 Wire 	470	87	4 019238 774535	31,95
0101401	50-584	27.5 x 2.00	 Wire 	700	65	4 019238 774627	31,95
0101402	28-622	28 x 1% x 11/8	 Wire 	425	101	4 019238 774610	31,95
0101406	32-622	28 x 1¼ x 1¾	 Wire 	485	87	4 019238 774597	31,95
0101412	37-622	28 x 1¾ x 15⁄8	 Wire 	500	87	4 019238 774559	31,95
0101416	42-622	28 x 1.60	 Wire 	590	87	4 019238 774504	31,95

Safety O System E 25

SAFETY LEVEL 1 2 3 4 5 6 7

CONTACT Speed

Г	1
	 L
	L
	 L
	 L
-	 J.

TECHNOLOGY



SIZES WIRE



SIZES WIRE REFLEX

CONTACT Speed

CONTA	c i spee	u l					
SafetySys	tem Breake	er - 3/180 TPI - 🗇				E25	04
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101388	28-406	20 x 1.10	Wire refl.	265	87	4 019238 774481	25,95
0101391	32-559	26 x 1.30	Wire refl.	430	87	4 019238 774474	35,95
0101392	42-559	26 x 1.60	Wire refl.	540	87	4 019238 774467	35,95
0101396	50-559	26 x 2.00	Wire refl.	665	58	4 019238 774450	35,95
0101399	50-584	27.5 x 2.00	Wire refl.	700	65	4 019238 774443	35,95
0101403	28-622	28 x 1% x 1½	Wire refl.	425	101	4 019238 774436	35,95
0101408	32-622	28 x 1¼ x 1¾	Wire refl.	485	87	4 019238 774429	35,95
0101414	37-622	28 x 1¾ x 15⁄8	Wire refl.	500	87	4 019238 774405	35,95
0101418	42-622	28 x 1.60	Wire refl.	590	87	4 019238 774382	35,95



SAFETY LEVEL 1 2 3 4 5 6 7

CONTACT Spike 120 and 240

TECHNOLOGY



SIZES





URBAN

<

CONTACT Spike 120 and 240

=	

TECHNOLOGY



SIZES


OUR RECOMMENDATION FOR SNOW AND ICE

Safety during cold and dark seasons: The spikes guarantee traction, the reflective stripes ensure visibility. Maintain full control of your bicycle even in turns and hard stops. Choose between 120 or 240 spikes.

Safety **O** System

The SafetySystem Breaker consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.





CONTACT Spike 120 and 240

Г	
1.	

TECHNOLOGY



SIZES

CONTA	ct Spike	e 120					
SafetySyst	tem Breake	er - 3/180 TPI - 🕞				E25	04
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150498	32-622	28 x 1¼ x 1¾	Wire refl.	640	94	4 019238 034868	45,95
0150269	37-622	28 x 1¾ x 15⁄8	Wire refl.	715	72	4 019238 779622	45,95
0150268	42-622	28 x 1.60	Wire refl.	865	87	4 019238 779639	45,95

Safety O System

CONTA	CT Spike	240					
SafetySyst	em Breake	er - 3/180 TPI - 🗇				E25	04
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0150091	37-622	28 x 1¾ x 15⁄8	Wire refl.	715	72	4 019238 610345	59,95
0150191	42-622	28 x 1.60	Wire refl.	865	87	4 019238 682267	59,95

Safety O System

Top CONTACT Winter II Prem.

_	 _

TECHNOLOGY



SIZES





URBAN

<

Top CONTACT Winter II Prem.



			 _		
TE(CН	NI (C)	



SIZES


THE PREMIUM WINTER TIRE

The Top CONTACT Winter II Premium benefits from our know-how as leading manufacturer of winter tires for cars and trucks and offers full control on slippery, snowy roads and surfaces thanks to its grippy lamellar tread pattern.



Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.





Top CONTACT Winter II Prem.

TECHNOLOGY

Top CONTACT Winter II Premium

TOP CONTACT WITTER IT Premium									
Vectran B	reaker - 3/1	80 TPI - 🔎					E50	U6	
Article	ETRTO	Dimension	Color/sidewall	g	PSI	kg+	EAN	RRP/€	
0100712	50-559	26 x 1.90	foldable refl.	610	58	121	4 019238 586275	69,95	
0101734	55-559	26 x 2.20	foldable refl.	745	58	128	4 019238 031836	69,95	
0101281	50-584	27.5 x 2.00	foldable refl.	615	65	121	4 019238 733297	69,95	
0100713	37-622	28 x 1¾ x 1%	foldable refl.	670	87	95	4 019238 586268	69,95	
0100714	42-622	28 x 1.60	foldable refl.	685	87	100	4 019238 586251	69,95	



н	
 _	-

SIZES

 $\bigstar \qquad \square$

Grand Prix Urban

- 1		
	 -	
	 - 1	
	 _	
	_	

TECHNOLOGY



SIZES





URBAN

<

Grand Prix Urban

-	

TECHNOLOGY



SIZES

THE STATEMENT TIRE FOR THE CITY

Combines a modern tread pattern design with the latest technology. Built with a tuned race construction while damping for comfort a matching mix for the urban ride. Its black reflective stripe* blends perfectly with the sidewall.




With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

* Does not meet the certification standard ECE-R88. Does not support reflective properties as per StVZO (Germany).



With **PolyX Breaker™** car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.



Grand Prix Urban

-		
-		
	_	

TECHNOLOGY


Grand Prix Urban

BlackChili Compound - PolyX Breaker - 3/180 TPI							
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0101575	35-622	28 x 1¾ x 15/8	foldable	335	87	4 019238 002447	53,95
0101673	35-622	28 x 1¾ x 15/8	foldable	335	87	4 019238 022940	53,95





SIZES



Developed together with




Super Sport Plus

1	 . 1	
	_	

TECHNOLOGY



SIZES

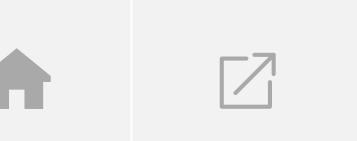



1	

TECHNOLOGY



SIZES

 \square

FIXIE OR RACING BIKE? SUPER FAST AND SUPER RELIABLE FROM A TO B

Fast on tarmac and bicycle paths with its special slick tread pattern. Longevity and high puncture protection are the main focus. A reliable companion also for newcomers to cycling.

Super Sport Plus							
Plus Breaker - 3/84 TPI							
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0100341	23-622	700 x 23C	foldable	380	123	4 019238 470512	34,95
0100344	23-622	700 x 23C	 Wire 	440	123	4 019238 470550	29,95
0100343	25-622	700 x 25C	foldable	425	123	4 019238 470536	34,95
0100342	25-622	700 x 25C	 Wire 	485	123	4 019238 470529	34,95
0100349	28-622	700 x 28C	 Wire 	565	116	4 019238 486278	34,95
0100347	28-630	27 x 1½	 Wire 	590	116	4 019238 486254	34,95
0100348	32-630	27 x 1¼	 Wire 	635	101	4 019238 486261	34,95




Urban Taraxagum

_	_
	_

TECHNOLOGY







Urban Taraxagum

URBAN

<

=	
=	

TECHNOLOGY



SIZES

GIVE SOMETHING BACK TO YOUR CITY!

The Urban Taraxagum is the first serial product made of dandelion rubber combining local production with minimal transport distances in the supply chain - ideal for the urban ride.



Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

TARAXA GUM

The Urban Taraxagum by Continental is the first serial bicycle tire made from dandelion rubber, for which we established the brand **Taraxagum.** The project is embedded in a comprehensive sustainability strategy, covering economic, ecological and social aspects. Through significantly shorter distances from the fields and our European tire plants we reduce efforts in logistics and transport and use resources more efficiently.



Urban Taraxagum

Г	_	


TECHNOLOGY

Urban 1	Faraxag	um					
Taraxagum - Vectran Breaker - 3/180 TPI							
Article	ETRTO	Dimension	Color/sidewall	g	PSI	EAN	RRP/€





SIZES






Funded by the European Union by the operational program of the ERDF during the 2014-2020 funding period



Supported by:

Supported by:



Federal Ministry of Food of Food and Agriculture

on the basis of a decision by the German Bundestag

on the basis of a decision by the German Bundestag



RIDE City

TECHNOLOGY







RIDE City

URBAN

<



TECHNOLOGY



SIZES

A ROBUST TIRE WITH A MODERN LOOK


High reliability and always on time in urban traffic: Solid tire for city bikes. Proven successful on tarmac as well as on gravel thanks to good traction provided by its broad contact area in the tread pattern.



Anyone looking for a reliable everyday companion will go for a tire with EXTRA PunctureBelt. This rugged rubber breaker, combined with the rubber-reinforced sidewalls of the tire, ensures a high level of puncture protection and sidewall abrasion. Where durability is the main focus, there is also a solid tire version.



Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.



RIDE City

URBAN

<

TECHNOLOGY



SIZES

RIDE City


ExtraPuncture Belt - 3/180 TPI

Article	ETRTO	Dimension	Col./side	g	PSI	EAN F	RRP/€	Article	ETRTO	Dimension	Col./side	g	PSI	EAN	R
0101552	47-559	26 x 1.75	Wire refl.	940	58	4 019238 810431	25,95	0101657	42-622	28 x 1.60	Wire refl.	950	65	4 019238 017106	
0101652	47-559	26 x 1.75	Wire refl.	960	58	4 019238 012514	25,95	0101648	42-622	28 x 1.60	Wire refl.	950	65	4 019238 012545	
0101651	47-559	26 x 1.75	Wire refl.	930	58	4 019238 012521	25,95	0101647	42-622	28 x 1.60	Wire refl.	950	65	4 019238 012552	
0101553	32-622	28 x 1¼ x 1¾	Wire refl.	700	79	4 019238 810424	25,95	0101556	47-622	28 x 1.75	Wire refl.	1100	58	4 019238 810394	
0101554	37-622	28 x 1¾ x 15⁄8	Wire refl.	850	65	4 019238 810417	25,95	0101607	47-622	28 x 1.75	Wire refl.	1100	58	4 019238 005387	
0101603	37-622	28 x 1¾ x 15⁄8	Wire refl.	850	65	4 019238 005349	25,95	0101679	47-622	28 x 1.75	Wire refl.	1100	58	4 019238 023244	
0101604	37-622	28 x 1¾ x 15⁄8	Wire refl.	850	65	4 019238 005356	25,95	0101658	47-622	28 x 1.75	Wire refl.	1160	58	4 019238 017090	
0101650	37-622	28 x 1¾ x 15⁄8	Wire refl.	820	65	4 019238 012507	25,95	0101608	47-622	28 x 1.75	Wire refl.	1100	58	4 019238 005394	
0101649	37-622	28 x 1¾ x 15⁄8	Wire refl.	820	65	4 019238 012538	25,95	0101646	47-622	28 x 1.75	Wire refl.	1050	58	4 019238 012569	
0101555	42-622	28 x 1.60	Wire refl.	950	65	4 019238 810400	25,95	0101645	47-622	28 x 1.75	Wire refl.	1050	58	4 019238 012576	
0101605	42-622	28 x 1.60	Wire refl.	950	65	4 019238 005363	25,95								
	A CONTRACTOR OF A CONTRACTOR O			A CANCELER STATE											



E25 **\$**5

SAFETY LEVEL Image: 1 minipage 1 minipage 2 mini



RIDE Tour



TECHNOLOGY



SIZES WIRE



SIZES WIRE REFLEX





RIDE Tour

Г	1

ТБ	CL	INO	CV
			UI

Г	
	### I

SIZES WIRE



SIZES WIRE REFLEX

A LOYAL COMPANION ON YOUR REGULAR RIDES


Tarmac, gravel, urban environment - the right tire for your daily ride thanks to robust puncture protection and an additional rubber layer for high milage. Available in a large range of colors and sizes.



Anyone looking for a reliable everyday companion will go for a tire with EXTRA PunctureBelt. This rugged rubber breaker, combined with the rubber-reinforced sidewalls of the tire, ensures a high level of puncture protection and sidewall abrasion. Where durability is the main focus, there is also a solid tire version.



Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.



RIDE Tour

	- 1
	- 1

TECHNOLOGY



SIZES WIRE



SIZES WIRE REFLEX

 \square

RIDE Tour

ExtraPuncture Belt - 3/180 TPI

Article	ETRTO	Dimension	Col./side	g	PSI	EAN	RRP/€	Article	ETRTO	Dimension	Col./side	g	PSI	EAN	F
0101137	62-203	12½ x 2¼	Wire	405	58	4 019238 693645	14,95	0101188	32-622	28 x 1¼ x 1¾	Wire	600	79	4 019238 694703	
0101138	47-305	16 x 1.75	 Wire 	490	58	4 019238 693638	14,95	0101155	37-622	28 x 1¾ x 1%	Wire	690	72	4 019238 693485	
0101140	47-406	20 x 1.75	Wire	600	58	4 019238 693614	16,95	0101180	37-622	28 x 1¾ x 15⁄8	Wire	725	72	4 019238 694673	
0101184	47-406	20 x 1.75	Wire	630	58	4 019238 694741	16,95	0101193	37-622	28 x 1¾ x 1%	Wire	725	72	4 019238 694734	
0101143	47-507	24 x 1.75	Wire	720	58	4 019238 693591	16,95	0101177	37-622	28 x 1¾ x 1%	Wire	725	72	4 019238 694581	
0101186	47-507	24 x 1.75	Wire	810	58	4 019238 694758	16,95	0101157	42-622	28 x 1.60	Wire	790	65	4 019238 693478	
0101148	47-559	26 x 1.75	Wire	780	58	4 019238 693553	23,95	0101159	47-622	28 x 1.75	Wire	900	58	4 019238 693461	
0101181	47-559	26 x 1.75	Wire	870	58	4 019238 694680) 23,95	0101179	47-622	28 x 1.75	Wire	960	58	4 019238 694697	
0101189	47-559	26 x 1.75	Wire	870	58	4 019238 694765	23,95	0101194	47-622	28 x 1.75	Wire	960	58	4 019238 694772	
0101187	37-584	26/27.5 x 1¾	Wire	690	72	4 019238 694727	23,95	0101185	47-622	28 x 1.75	Wire	960	58	4 019238 694642	
0101146	42-584	26/27.5 x 1½	 Wire 	720	65	4 019238 693577	23,95	0101161	32-630	27 x 1¼	Wire	660	79	4 019238 693447	
0101150	54-584	26/27.5 x 1½ x 2	Wire	950	58	4 019238 693539	23,95	0101183	32-630	27 x 1¼	Wire	610	79	4 019238 694710	
0101433	37-609	27 x 1¾ x 1½	Wire	685	72	4 019238 781823	23,95	0101164	37-635	28 x 1¾	Wire	710	72	4 019238 693416	
0101151	28-622	28 x 1% x 1%	Wire	540	101	4 019238 693522	23,95	0101165	42-635	28 x 1½	Wire	820	65	4 019238 693409	
0101153	32-622	28 x 1¼ x 1¾	Wire	640	79	4 019238 693508	23,95								
													Cashing and the state		





1

E25 **\$**5

4 5 6 7 3

RRP/€ 23,95 23,95 23,95 23,95 23,95 23,95 23,95 23,95 23,95 23,95 23,95 23,95 23,95 23,95

RIDE Tour

TECHNOLOGY



SIZES WIRE



SIZES WIRE REFLEX

RIDE Tour

ExtraPuncture Belt - 3/180 TPI

Article	ETRTO	Dimension	Col./side	g	PSI	EAN	RRP/€	Article	ETRTO	Dimension	Col./side	g	PSI	EAN	R
0101139	47-305	16 x 1.75	Wire refl.	490	58	4 019238 693621	16,95	0101156	37-622	28 x 1¾ x 15⁄8	Wire refl.	690	72	4 019238 692549	
0101142	47-406	20 x 1.75	Wire refl.	600	58	4 019238 693607	18,95	0101182	37-622	28 x 1¾ x 15⁄8	Wire refl.	725	72	4 019238 694598	
0101144	47-507	24 x 1.75	Wire refl.	720	58	4 019238 693584	18,95	0101167	42-622	28 x 1.60	Wire refl.	790	65	4 019238 693386	
0101149	47-559	26 x 1.75	Wire refl.	780	58	4 019238 693546	25,95	0101176	42-622	28 x 1.60	Wire refl.	790	65	4 019238 694611	
0101175	47-559	26 x 1.75	Wire refl.	870	58	4 019238 694628	25,95	0101160	47-622	28 x 1.75	Wire refl.	900	58	4 019238 693454	
0101147	42-584	26/27.5 x 1½	Wire refl.	720	65	4 019238 693560	25,95	0101162	32-630	27 x 1¼	Wire refl.	660	79	4 019238 693430	
0101168	54-584	26/27.5 x 1½ x 2	Wire refl.	720	65	4 019238 693379	25,95	0101164	37-635	28 x 1¾	Wire refl.	710	72	4 019238 693416	
0101152	28-622	28 x 1% x 1%	Wire refl.	540	101	4 019238 693515	25,95	0101166	42-635	28 x 1½	Wire refl.	820	65	4 019238 693393	
0101154	32-622	28 x 1¼ x 1¾	Wire refl.	640	79	4 019238 693492	25,95								



E25 **\$**5

SAFETY LEVEL Image: 1 minipage 2 minipage 3 minipage 2 minipage 3 mini



Competition

Competition TT

Sprinter

Sprinter Gatorskin

ATORSKIN



5-35

 \square



Competition

_	
- E	 -

TECHNOLOGY







TUBULAR

Competition



TECHNOLOGY



SIZES

IT'S TIME TO RACE: THE CLASSIC FOR STRONG ACCELERATION


Robust all-rounder appearing at the sharp end in all the major cycling races around the world. Agile and fast, adapts to the competition in all road conditions.

BLACKCHIL

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.



Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.



Competition

L.		
	_	

TECHNOLOGY

motilie

Compe	Competition										
BlackChili	BlackChili Compound - Vectran Breaker - 3/180 TPI										
Article	Dimension	Color/sidewall	g	PSI	EAN	RRP/€					
0196138	28 x 22	Tubular	270	174	4 019238 334760	122,95					
0196189	28 x 25	Tubular	285	174	4 019238 549126	122,95					









Competition TT



TECHNOLOGY



SIZES



可能



TUBULAR

Competition TT

TECHNOLOGY



SIZES

EVEN FASTER

Even faster time trial tire due to the delicate carcass. Design updated to a smooth central tread pattern.


I **BLACK**CH

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

Excellent acceleration thanks to the application of a latex tube. ! Please consider the special attributes of latex tubes.



Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.



Competition TT

	1

TECHNOLOGY

Compe	tition TT					
BlackChili	BlackChili Compound - Vectran Breaker - 3/180 TPI					
Article	Dimension	Color/sidewall	g	PSI	EAN	RRP/€









Sprinter

- 6	
- 1	
- 1	
- 1	
- 1	
- 1	
- L	

TECHNOLOGY







Sprinter

TUBULAR

\equiv	

TECHNOLOGY



SIZES

FAST SPRINTER, FOR WINNING THE POINTS

Efficient tires for criteriums or triathlon where the tires winning characteristics will shine through. Neutral slick profile for a direct feel with the road. Full speed ahead!



With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

Safety **O** System

The SafetySystem Breaker consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.



Sprinter

TUBULAR

<

Г	
- L.	

TECHNOLOGY

Sprinter						
BlackChili	Compound - Sa	afetySystem Breake	r - 3/180	O TPI		
Article	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0196150	26 x 22	 Tubular 	265	174	4 019238 341034	69,95
0196135	28 x 22	Tubular	285	174	4 019238 334715	69,95
0196244	28 x 25	Tubular	300	174	4 019238 674576	69,95









Sprinter Gatorskin

_	 _
- E	

TECHNOLOGY







TUBULAR

Sprinter Gatorskin



TECHNOLOGY



SIZES

THE ROBUST SPRINTER, CREATED FOR EXTENDED RIDES AND TRAINING

The roads of Flanders, Roubaix and San Remo are home to this tough tubular. Durable and puncture protected carcass, ready for hundreds of kilometres, even on bad roads.

BLACK CHILI

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

Safety **O** System

The **SafetySystem Breaker** consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.

X DuraSkin®

Tires with **DuraSkin**[®] sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The highquality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin[®] can be identified by the characteristic brown mesh sidewall.

Sprinter Gatorskin


Г	
L.	
L.	
L.	
L.	

TECHNOLOGY

Sprinter Gatorskin						
BlackChili	Compound - Sa	ifetySystem Breake	r - 3/180	O TPI		
Article	Dimension	Color/sidewall	g	PSI	EAN	RRP/€
0196136	28 x 22	 Tubular 	275	174	4 019238 334722	74,95
0196187	28 x 25	Tubular	290	174	4 019238 549089	74,95


BLACK CHILI Safety O System Solura Skin®





ROAD	MTB		GRAV
Grand Prix TR	Dubnital		Terra Adventure
Aero 111	Trinotal		Terra Trail
Grand Prix 5000 AS TR	Magnotal		Terra Speed
Grand Prix 5000 S TR	Xynotal		Terra Hardpack
Grand Prix 5000 TT TR	Kryptotal	A CONTRACT OF THE OWNER	
Grand Prix 5000	Argotal		
Ultra Sport III	Hydrotal		
Gator Hardshell	Mountain King	Jan Contraction	
Gatorskin	Cross King		
Grand Sport Race	Race King		
	Ruban eRuba	n Aller	

URBAN

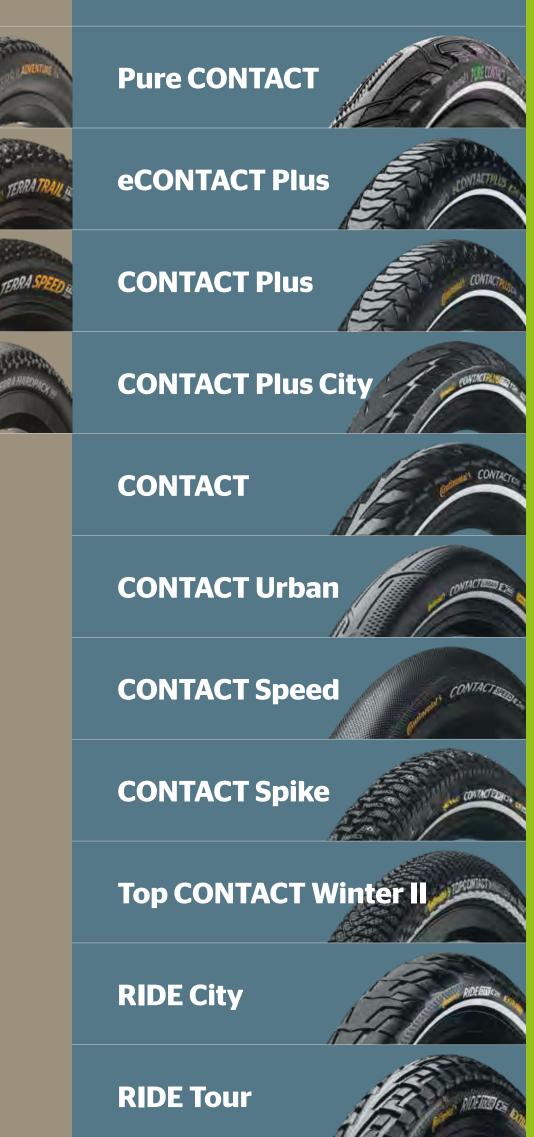

Suitable for E-Bikes

For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. Allmost all of our urban/ tour tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.



BlackChili Compound

PureGrip Compound

PolyX Breaker™

NyTech Breaker

Hardshell Protection

Vectran Breaker

DuraSkin®

SafetyPro Breaker

EXTRA PunctureBelt

Puncture ProTection

SafetyPlus Breaker

SafetySystem Breaker

SafetyPlus Pro Breaker








BlackChili Compound

TECH

IT'S ALL ABOUT HOW YOU MIX IT

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.







PureGrip Compound

TECH

PURE GRIP FOR EVERYONE

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.







CUT AND PUNCTURE PROOF

With PolyX Breaker[™] car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.







LIGHT AND SLEEK

The Nytech Breaker is based on the technology of our SafetySystem puncture protection. Made of nylon fibre and similar to Kevlar, it reliably protects against punctures and cuts. It also has particularly low rolling resistance and reduced weight, perfect for our performance range of road tires.





Hardshell ProTection

TECH

MORE IS WHAT YOU GET

Puncture protection and mileage are the strengths of Hardshell-ProTection. A wider PolyX Breaker[™], the specialist against punctures, under the tread centre and shoulders provides for great reliability. The three-ply – each layer with 60 TPI – carcass covers the entire tire and makes it a real bastion against urban detritus. The outer sidewalls of the tire are reinforced with DuraSkin[®] fabric providing even more reliablility due to the casing being so well protected. Hardshell tires are the puncture-resistant flagship amongst racing tires.

HILLI

ALLININ .

ALLIN N

ALTINIAL MINIST


NNNNN

V.V.N.N.N.YI

V.N.N.N







CUT AND PUNCTURE PROOF

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

5

6

7



Û

2

3

4

hland GmbH

DuraSkin[®]

IECH

FOR HARD CASES

Tires with DuraSkin[®] sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin[®] can be identified by the characteristic brown mesh sidewall.



2

3

4

5

6

11111111

ALTINIALALA

ATHIN MALANTIN

NNNNN

1 N.N.N.

1111111

TECH

SafetyPro Breaker

LIGHTWEIGHT PUNCTURE PROTECTION

The new SafetyPro Breaker designed from nylon textile. Cross-woven textile fiber netting that is simultaneously robust and flexible. Maximum puncture protection with minimal added weight. The risk of punctures resulting from glass or sharp stones is substantially reduced.

5

6

7





3

EXTRA PunctureBelt

TECH

CAREFREE ON A DAILY BASIS

Anyone looking for a reliable everyday companion will go for a tire with EXTRA PunctureBelt. This rugged rubber breaker, combined with the rubber-reinforced sidewalls of the tire, ensures a high level of puncture protection and sidewall abrasion. Where durability is the main focus, there is also a solid tire version.



Ũ

3

4

5

6

Puncture ProTection

TECH

THE NAME SPEAKS FOR ITSELF

and sidewall abrasion.



SAFETY LEVEL

2

An impeccable rubber Breaker, created for the daily ride on your Urban/Tour bike. The breaker ensures a high level of puncture protection



4

5

6

TECH

SafetyPlus **Breaker**

THE ANTI-PUNCTURE SPECIALIST

Specially designed for e-bikes up to 50 km/h, we have combined our SafetySystem Breaker with a highly flexible natural rubber. The result is an extremely cut and puncture resistant breaker ply which has a low rolling resistance thanks to its high elasticity. This helps saving battery life and the environment. High acceleration torques and fast speeds in turns are easily absorbed by the breaker. The specialist for fast e-bikes and rental bikes.

5

6





Ũ

3

SafetySystem Breaker

PUNCTURE PROTECTION AS A SYSTEM

The SafetySystem Breaker consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.

5

4

6

7



Ũ

SafetyPlus Pro **Breaker**

THE SPECIALIST FOR E-BIKES AND CARGO BIKES

Engineered for the unique demands of modern e-bikes and cargo bikes up to 50 km/h. Our SafetyPlus Pro Breaker technology combines highly flexible rubber with the proven strength of our tightly woven PolyX puncture-resistant fibers. The high elasticity keeps rolling resistance low, prolonging the e-bike battery life so you get moremiles from each charge. When riding with heavy loads, the SafetyPlus Pro Breaker contributes to confident handling through busy traffic and sharp corners, no matter the conditions.

5

6





Ũ

3



SIZES 12" - 27.5"



SIZES 27.5" - 28"



SIZES 28"



SIZES 28" - 29"

7

12" 62-203 **RIDE** Tour 16" 35-349 CONTACT Urban 47-305 Double Fighter III **RIDE** Tour 20" 28-406 CONTACT Speed 32-406 CONTACT Urban 37-406 CONTACT 42-406 CONTACT Urban 47-406 Double Fighter III CONTACT **RIDE** Tour

50-406 Cross King eCONTACT Plus CONTACT Urban 55-406 eCONTACT Plus 60-406 Kryptotal Fr Kryptotal Re 62-406 eRuban Plus eCONTACT Plus 24" 47-507 Double Fighter III CONTACT Plus **RIDE** Tour 50-507 Cross King Double Fighter III 60-507 Kryptotal Fr

60-507	50-559	58-559
Kryptotal Re	Cross King ShieldWall	Cross King
26"	Race King	Cross King ShieldWall
23-571	Race King ShieldWall	eRuban Plus
Gatorskin	Double Fighter III	60-559
26 x 22	CONTACT Urban	Kryptotal Fr
Sprinter	CONTACT Speed	Kryptotal Re
28-559	Top CONTACT Winter II Premium	27"
Gatorskin	55-559	28-630
32-559	Trinotal	Super Sport Plus
CONTACT Speed	Cross King	32-630
42-559	Cross King ShieldWall	Gator Hardshell
CONTACT Speed	Race King	32-630
47-559	Race King ShieldWall	Gatorskin
Hometrainer II	Speed King	Super Sport Plus
CONTACT Plus	eCONTACT Plus	RIDE Tour
47-559	CONTACT Plus City	37-609
CONTACT Plus City	CONTACT Urban	RIDE Tour
CONTACT	Top CONTACT Winter II Premium	27.5"
CONTACT Urban	58-559	25-584
RIDE City	Mountain King	Grand Prix 5000
RIDE Tour	Mountain King ShieldWall	Ultra Sport III



SIZES 12" – 27.5"




SIZES 27.5" – 28"



SIZES 28"



SIZES 28" – 29"



28-584

Grand Prix 5000

Ultra Sport III

30-584

Grand Prix 5000 S TR

32-584

Grand Prix 5000 S TR

CONTACT Speed

35-584 Terra Speed ProTection

37-584

RIDE Tour

40-584

Terra Trail ProTection

Terra Speed ProTection

42-584

CONTACT Plus

CONTACT Urban

RIDE Tour

47-584

Terra Trail ShieldWall

50-584

Hometrainer II

Cross King

Cross King ShieldWall

Race King

Race King ShieldWall

Double Fighter III

Terra Hardpack

Pure CONTACT

CONTACT Urban

CONTACT Speed

Top CONTACT Winter II Premium

54-584

Ruban

Ruban ShieldWall

RIDE Tour

55-584

Dubnital


Cross King

Cross King ShieldWall

Race King

Race King ShieldWall

	55-584	60-584	23-622
	Pure CONTACT	Pure CONTACT	Gator Hardshell
	eCONTACT Plus	62-584	Gator Hardshell Black Ec
	CONTACT Plus City	eCONTACT Plus	Gatorskin
	CONTACT Urban	CONTACT Urban	Gatorskin Black Edition
	58-584	65-584	Grand Sport Race
	Ruban	Magnotal	Hometrainer II
	Ruban ShieldWall	Kryptotal Re	Super Sport Plus
	eRuban Plus	Argotal	25-622
	Mountain King	Mountain King ShieldWall	Grand Prix TR
	Mountain King ShieldWall	Cross King ShieldWall	Grand Prix 5000 AS TR
n	Cross King	Ruban	Grand Prix 5000 S TR
	Cross King ShieldWall	Ruban ShieldWall	Grand Prix 5000 TT TR
	60-584	eRuban Plus	Grand Prix 5000
	Dubnital	70-584	Grand Prix 4-Season
	Trinotal	Mountain King ShieldWall	Ultra Sport III
	Magnotal	Cross King ShieldWall	Gator Hardshell
	Xynotal	28"	Gator Hardshell Black Ed
	Kryptotal Fr	23-622	Gatorskin
	Kryptotal Re	Grand Prix 5000	Gatorskin Black Edition
	Argotal	Grand Prix 4-Season	Grand Sport Race
	Hydrotal	Ultra Sport III	Super Sport Plus

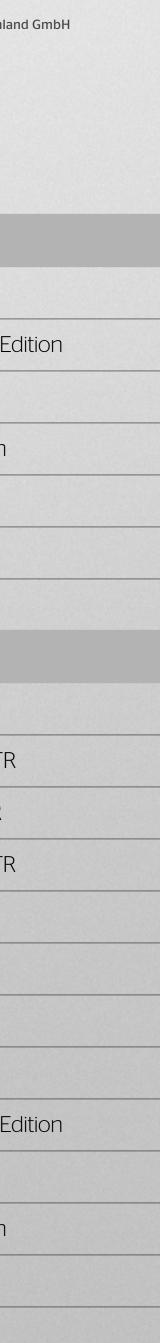



SIZES 12" – 27.5"



SIZES 27.5" – 28"



SIZES 28"



SIZES 28" - 29"



26-622 AERO 111

28-622

Grand Prix TR

Grand Prix

Grand Prix 5000 AS TR

Grand Prix 5000 S TR

Grand Prix 5000 TT TR

Grand Prix 5000

Grand Prix 4-Season

Ultra Sport III

Gator Hardshell

Gator Hardshell Black Edition

Gatorskin

Gatorskin Black Edition

Grand Sport Race

CONTACT Plus

CONTACT

CONTACT Urban

CONTACT Speed

Super Sport Plus

RIDE Tour

26 x 22 Competition 28 x 19 Competition 28 x 22 Competition Sprinter Sprinter Gatorskin 28 x 23 Sonderklasse II 28 x 25 Competition Sprinter Sprinter Gatorskin 29-622 AERO 111

30-622

Grand Prix TR

Grand Prix

Grand Prix 5000 S TR

Grand Prix 5000

32-622	35-622	40-622
Grand Prix TR	Grand Prix Urban	Terra Speed ProTection
Grand Prix 5000 AS TR	Terra Speed ProTection	Terra Trail ShieldWall
Grand Prix 5000 S TR	Terra Trail ShieldWall	Pure CONTACT
Grand Prix 5000	CONTACT Urban	CONTACT Plus
Grand Prix 4-Season	Urban TaraxaGum	CONTACT Urban
JItra Sport III	37-622	42-622
Sator Hardshell	Double Fighter III	CONTACT Plus
Sator Hardshell Black Edition	CONTACT Plus	CONTACT Plus City
Gatorskin	CONTACT Plus City	CONTACT
Gatorskin Black Edition	CONTACT	CONTACT Urban
Grand Sport Race	CONTACT Urban	CONTACT Speed
Iometrainer II	CONTACT Speed	CONTACT Spike 120
CONTACT Plus	CONTACT Spike 120	CONTACT Spike 240
CONTACT	CONTACT Spike 240	Top CONTACT Winter II
2-622CONTACT Urban	Top CONTACT Winter II Premium	RIDE Tour
CONTACT Speed	RIDE Tour	RIDE City
CONTACT Spike 120	RIDE City	42-635
RIDE City	37-635	CONTACT Plus
RIDE Tour	RIDE Tour	RIDE Tour
5-622	40-622	45-622
Grand Prix 5000 AS TR	Terra Trail ProTection	Terra Adventure

II Premium



SIZES 12" - 27.5"



SIZES 27.5" - 28"



SIZES 28"



SIZES 28" - 29"

 \square

45-622
Terra Trail ShieldWall
Terra Speed ProTection
47-622
Pure CONTACT
CONTACT Plus
CONTACT Plus City
CONTACT
CONTACT Urban
RIDE Tour
RIDE City
50-622
Terra Adventure
Terra Hardpack ShieldWall
Pure CONTACT
eCONTACT Plus
CONTACT Urban
55-622
Pure CONTACT
eCONTACT Plus

62-622

eCONTACT Plus

CONTACT Urban

29"

50-622

Cross King

Cross King ShieldWall

Race King

Race King ShieldWall

Double Fighter III

Pure CONTACT

54-622

Ruban

Ruban ShieldWall

eRuban Plus

55-622

Dubnital

Trinotal

Cross King

Cross King ShieldWall

Race King

Race King ShieldWall

55-622	65-622
Terra Adventure	Kryptotal Re
Pure CONTACT	Argotal
58-622	Cross King ShieldWall
Mountain King	Ruban
Mountain King ShieldWall	Ruban ShieldWall
Cross King	eRuban Plus
Cross King ShieldWall	
Ruban	
Ruban ShieldWall	
eRuban Plus	
60-622	
Dubnital	
Trinotal	
Magnotal	
Xynotal	
Kryptotal Fr	
Kryptotal Re	
Argotal	
Hydrotal	
65-622	

Tubes



TPU




WORKSHOP




HERMETIC PLUS



COMPACT



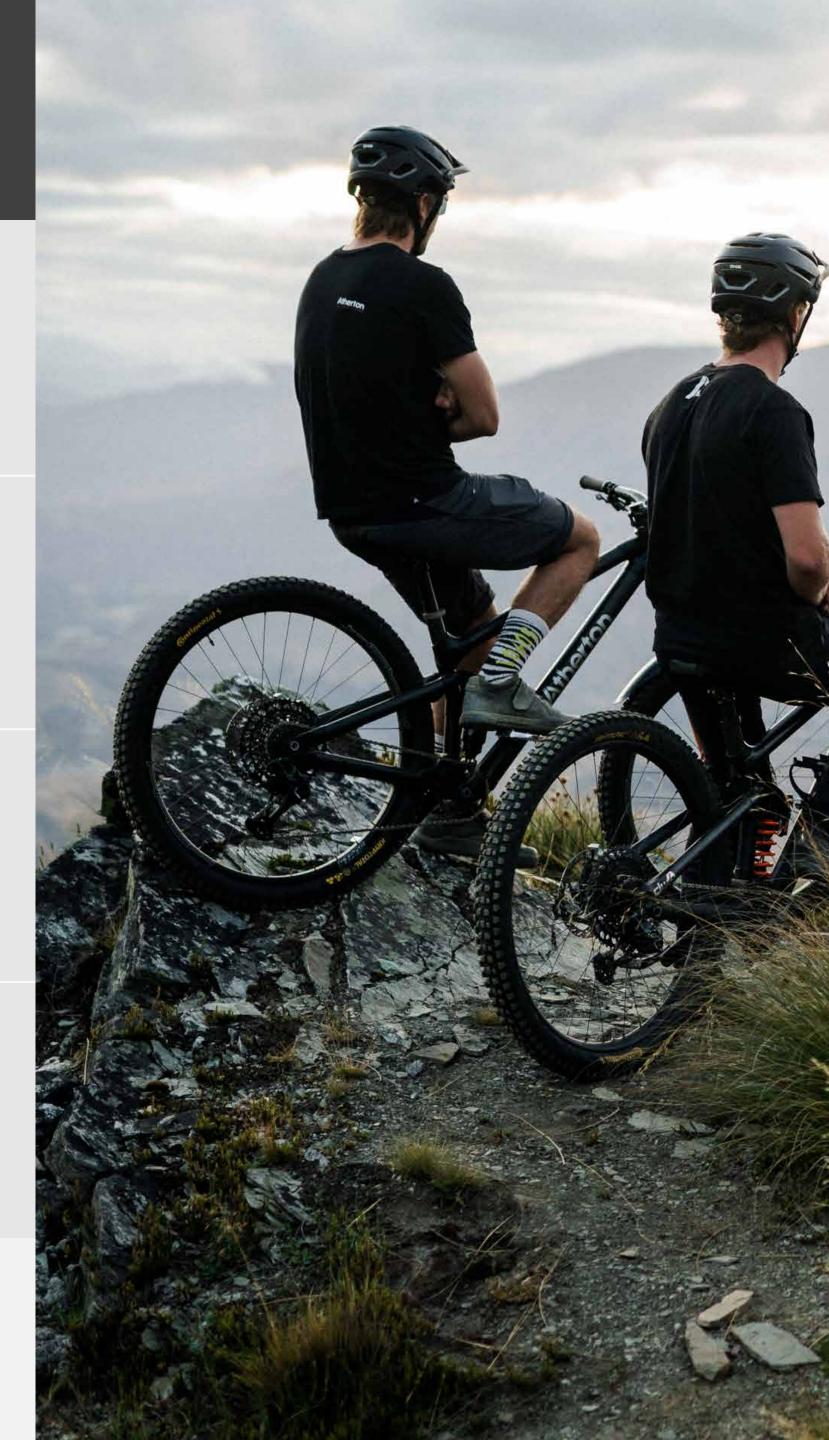

With the **ContiTube program**, you can find the inner tube most suited to your needs. Depending on your tire dimensions and purpose, different sizes, types, valve types and widths are available.

All

The all-rounder for day to day demands. Available in all usual dimensions.

Light und Supersonic

Perceptible optimization of weight and rolling resistance due to thinner material. ! Light tubes generally require more frequent reinflating.

Hermetic Plus


The all-round carefree product. Designed for the most comprehensive puncture protection and air retention due to enhanced butyl content and increased wall thickness.


Freeride und Downhill

Extra strong and increased volume. Effectively protects against punctures thanks to thicker material.

TPU

Small but mighty. Highest grade of micrometer-thick TPU deployed across seven sealed layers. Suitable for road and off-road riders.

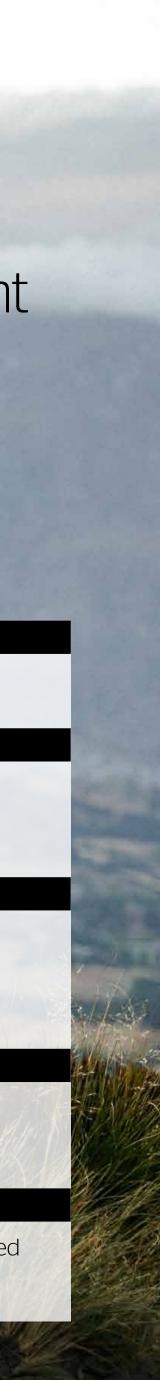

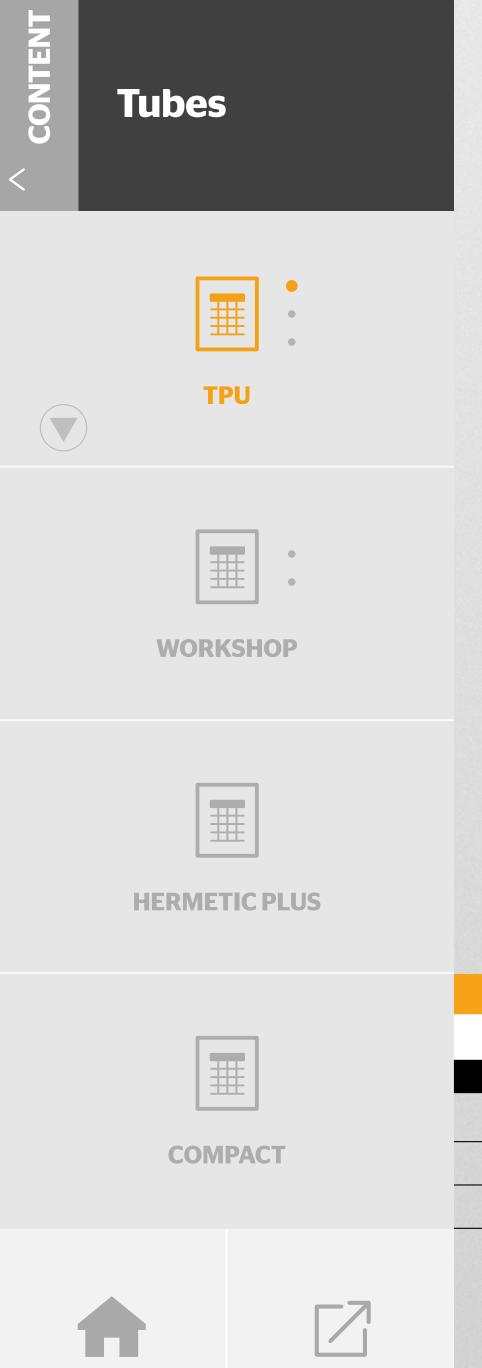

TPU TUBES

A seven-layer lightweight TPU Inner Tube for performance-focused and space-saving road, gravel and MTB riders.

Available in a wide range of sizes from 25/35-622, ContiTPU is premium, lightweight yet durable and suitable for both road and off-road riders.

The highest grade of micrometer-thick TPU deployed across seven sealed layers maximises airtightness and durability. The tubes are uncoloured to further ensure the highest material

			Auto Schrader			Dunlop	Sclaverand Presta	Sclaverand Presta	Sclaverand Presta	Sclaverand Presta		
		A34	A34 45°	A40	D26	D40	S42	S60	S80	S100		
TPU												
ETRTO	Version	Article	Article	Article	Article	Article	Article	Article	Article	Article	g	RRP €
28"												
40-584->60-584	TPU							0182611			45	30,95
25-622->35-622	TPU						0182711	0182621	0182721	0182731	35	30,95
40-622->60-622	TPU							0182631			45	30,95


quality and prevent air retention issues caused by dye-related surface imperfections. Every ContiTPU tube is quality-checked post-production. The base of the valve shaft is slightly conical in shape to improve fit to the wheel rim and reduce unwanted movement, while the value is internally threaded to allow for the use of valve extensions or a replacement valve core.







COMPACT





Lightweight



0182621

Low rolling resistance







Tubes

TPU WORKSHOP HERMETIC PLUS



COMPACT



IMPORTANT INFORMATION


1. TPU tubes must never be used in conjunction with rim

brakes. Excessive heat exposure can lead to a sudden loss of air pressure.


2. Use suitable rim tape to protect the TPU tube. Otherwise,


it can become damaged.

3. During mounting, the TPU tubes must not be inflated over 0.3 bar. Over-inflation during this part of the process can excessively stretch the tube and render it unusable.

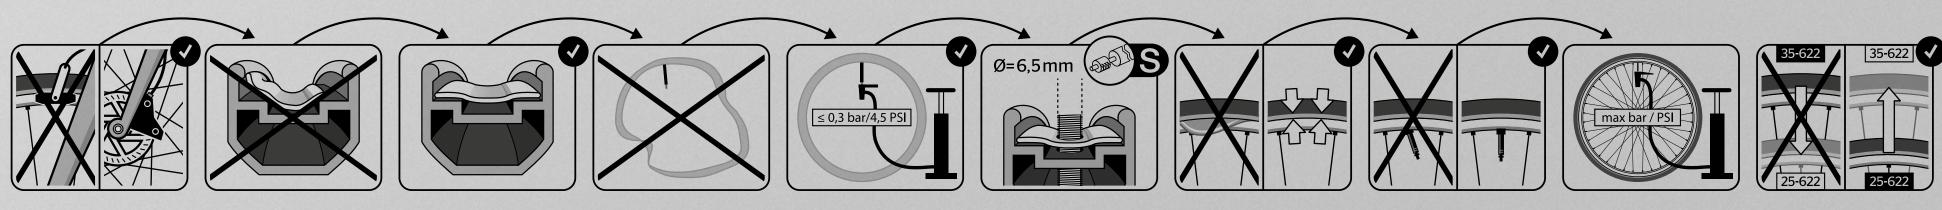


- 4. Ensure the valve hole in the rim is the correct diameter. If the valve hole is too large, the valve can twist or shear off.
- 5. Pay close attention when mounting the tube. Always ensure the tube or valve isn't trapped, twisted or damaged.
- 6. TPU tubes must never be re-used with a smaller tire! If you are mounting a smaller tire, then it is necessary to use a new tube.













Tubes





TPU




WORKSHOP



HERMETIC PLUS

L	
	\mp
	<u></u>



			Comma A		and the second se	D	D S	B	S		
			Auto Schrader		Blitz	Dunlop	Sclaverand Presta	Sclaverand Presta	Sclaverand Presta		
		A34	A34 45°	A40	D26	D40	S42	S60	S80		
Workshop (50 pcs/P											
ETRTO	Version	Article	Article	Article	Article	Article	Article	Article	Article	g	RRP €
26"											
47-559->62-559	MTB			0180581		0180521	0180551			205	
26" (27.5")											
37-559->47-597	Tour					0180621				175	
	Tour Hermetic Plus					0180751				255	
27.5"											
47-584->62-584	MTB						0182351			230	
28" / 29"											
18-622->25/630	Race						0180591	0180611	0180024	100	
32-622->47-642	Tour			0180691		0180651	0180681			165	
	Tour Hermetic Plus			0180721		0180711				225	
47-622->62-622	MTB						0182361			235	
Race 26"											
20-559->25-571							0181371	0181381		150	starts with 9,95
	Light						0181391	0181411		70	starts with 11,95
	Supersonic						0181421	0181431		50	starts with 13,95
Race 28"											
20-622->25-630							0181781	0181791	0180000	100	starts with 9,95
	Light						0181821	0181831	0181871	85	starts with 11,95
	Supersonic						0181881	0181891		100	starts with 16,95
25-622->32-630	Wide						0181921	0181931		125	starts with 8,95
Cross 28"											
32-622->47-622							0181941	0181951		160	starts with 8,95
										100	

Tubes





TPU




WORKSHOP

L	
L	
L	
L	

HERMETIC PLUS

L	
L	
L	
L	



			C				S		B		
		A34	Auto Schrader	A40	D26	Dunlop D40	Sclaverand Presta	Sclaverand Presta	Sclaverand Presta		
ETRTO	Version	Article	Article	Article	Article	Article	Article	Article	Article	g	RRP €
MTB 26"											
47-559->62-559				0181611		0181621	0181631	0181671		205	starts with 8,95
47-559->60-559	Light						0181681			125	11,95
47-559->55-559	Supersonic						0181691			100	16,95
57-559->70-559	Freeride			0181721			0181731			295	15,95
	Downhill			0181771						535	15,95
MTB 27.5"											
47-584->62-584				0182331			0182311			230	8,95
47-584->60-584	Light						0182341			145	11,95
65-584->70-584	Wide			0180017			0180015			345	11,95
	Wide Light						0180019			275	14,95
MTB 29"											
47-622->62-622				0182171		0183051	0182181	0182191		235	starts with 8,95
47-622->60-622	Light						0182321	0182201		190	starts with 11,95
65-622->70-622	Wide			0180031			0180034			325	11,95
Tour 26"											
28-559->32-597	Slim					0181471	0181481			145	8,95
37-559->47-590	All			0181491		0181511	0181521			175	8,95
47-559->62-559	Wide			0181531		0181571	0181591			200	8,95
Tour 28"											
28-622->37-622/32-630	Slim			0181971		0181981	0181991			140	8,95
32-622->47-622/42-635	All			0182001		0182021	0182031	0182041		165	starts with 8,95
	Light			0182051		0182061	0182071			115	11,95
47-622->62-622	Wide			0182121		0182131	0182161			235	8,95

Tubes





TPU



WORKSHOP

		_	-	
-	Н	Н	H	
			С	

			Auto Schrader		Blitz Du		Sclaverand Presta	Sclaverand Presta	Sclaverand Presta		
		A34	A34 45°	A40	D26	D40	S42	S60	S80		
Hermetic Plus											
ETRTO	Version	Article	Article	Article	Article	Article	Article	Article	Article	g	RRP €
Compact 20"											
32-406->47-451		0180037				0180039				190	9,50
50-406->62-406	Wide	0180042				0180045				230	9,50
Compact 24"											
32-507->47-544				0182231		0182241				235	9,50
55-507->62-507	Wide			0182581						370	9,50
Tour 26"											
37-559->47-590	All			0182251		0182261	0182271			255	9,50
47-559->62-559	Wide					0181581				300	9,50
Tour 28"											
32-622->47-622/42-635	All			0182101		0182081	0182091			225	9,50
47-622->62-622	Wide					0182151				325	9,50

HERMETIC PLUS





Tubes





TPU




WORKSHOP

	_
L	ŦŦ.

HERMETIC PLUS





			Guilla			D	S	S	S		
			Auto Schrader		Blitz D		Sclaverand Presta	Sclaverand Presta			
Compact Tubos		A34	A34 45°	A40	D26	D40	S42	S60	S80		
Compact Tubes	Manaian	A subt all a	Andiala	Autholo	A subt all a	Autholo	A		A		
ETRTO	Version	Article	Article	Article	Article	Article	Article	Article	Article	g	RRP€
Compact 8"											
54-110					0180991					70	7,50
Compact 10" /11" / 12) ;;										
44-194->62-222		0181051	0182211		0181071					95	7,50
Compact 14"											
32-279->47-298					0181081					100	7,50
Compact 16"											
32-305->47-349		0181091			0181111		0181121			110	7,50
50-305->62-305	Wide	0181131			0181171					120	7,50
Compact 18"											
32-355->47-400				0180026	0181181					125	7,50
Compact 20"											
28-406->32-451	Slim						0181191			105	7,50
	JIIII	0101211				0101221					
32-406->47-451		0181211				0181221	0181231			135	7,50
50-406->62-406	Wide	0181271				0181281				155	7,50
Compact 24"											
32-507->47-544				0181291		0181311	0180027			155	7,50
50-507->60-507	Wide			0181321		0181331				195	7,50

CONTEN

Support


	- 1
	- 1
	- 1
	- 1
	- 1
	- 1
	- 1

INSTRUCTION 1 - 3

INSTRUCTION 4 - 6

Г		
L		

INSTRUCTION 7 - 9



TIPS AND TRICKS

In individual cases where the tire bead does not properly sit on the inside of the rim, try unscrewing the valve nut and pushing the valve back. Valves with a round rubber end have a lower volume than those with a rectangular rubber end. Maybe you could try to change your existing valve to fit your tire accordingly.

RECOMMENDED AMOUNTS OF SEALANT PER TIRE

0	Dimension	Filling amour
ROA	25 mm	30 - 60 ml
R	28 mm	60 - 90 ml
	Dimension	Filling amour
0	2.0 - 2.1	80 - 100 ml
	2.2 - 2.3	100 - 120 ml
2	2.4 - 2.5	120 - 150 ml
	2.6 - 2.8	150 - 180 ml



Support

CONTENT

Г	_
	 _
	 _
	 _


INSTRUCTION 1-3

INSTRUCTION 4-6


Г	

INSTRUCTION 7-9




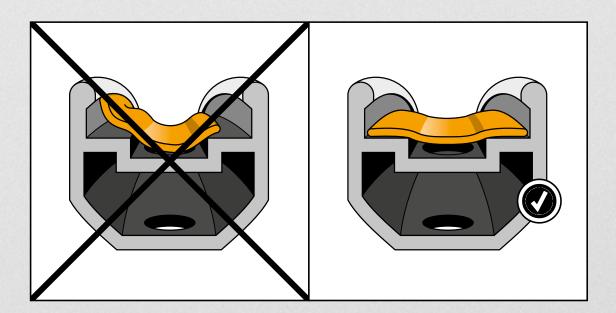

Check both rim and rim tape. Only use Tubeless ready rims. Ensure that the rim tape covers the rim well with at least two layers.

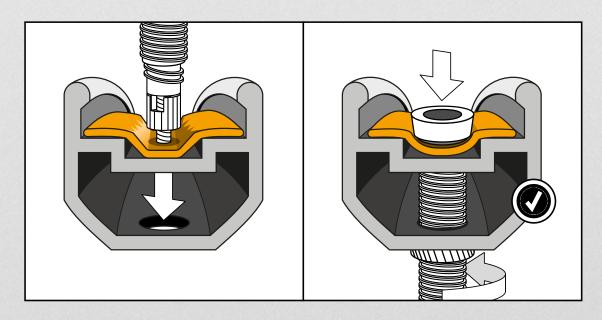

Mount the Tubeless valve first. 2 Install it from the inside of the rim and tighten the nut. Press your finger on the rubber end of the valve to secure a better fit. Only tighten the nut by hand, do not use any tools.



Before the initial inflation you can 3 apply some soapy-water or a mounting pad on the contact points between tire and rim bed. This can help improve mounting the tire on the rim.



Support

Г	
	 . 1
	 . 1
	 . 1
	 - 1
	 . 1
	- 1
	 _


INSTRUCTION 1-3

	_	
	-	
	-	
	-	


INSTRUCTION 4-6

Г	 1
	 L
	 L
	 L
	 L
	L

INSTRUCTION 7-9

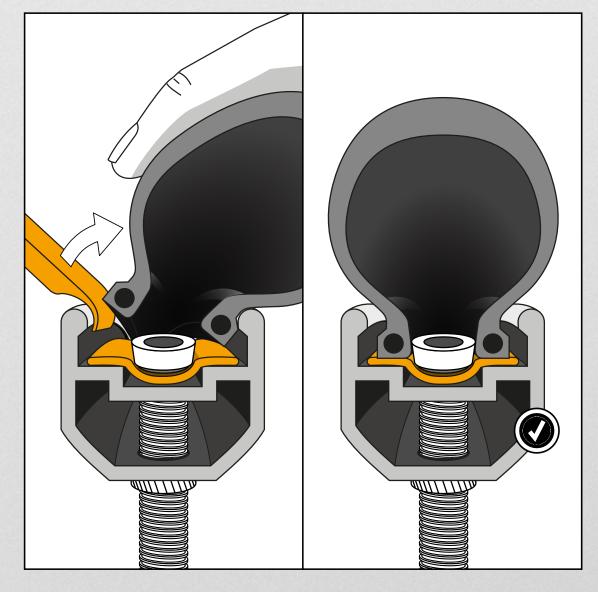


Mount the Tubeless tire on the rim in correct orientation of rotation. Ensure no loose pieces (e.g. sand, plastics) are found inside. Due to the tighter dimension tolerances of a Tubeless tire compared to a normal Clincher tire it may be helpful for you to use tire levers.

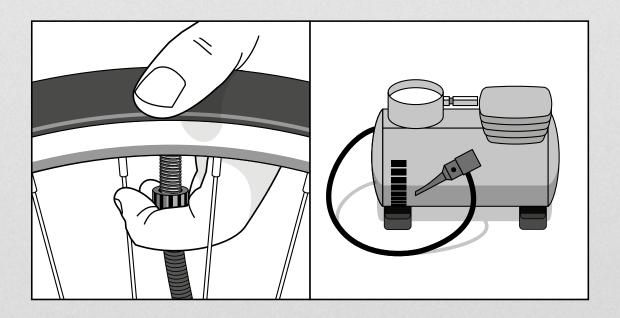


To fit the tire between the hooks, you 5 may need a higher amount of air in the first instance. If you are using a floor pump, it is better to maintain a constant momentum within the first few seconds. A modern floor pump with a second inflatable cartridge can help to achieve this.

If a floor pump does not fill and accurately seat the tire, a compressor could help. You may need to adapt to the respective bicycle valve.



Please note, that the pressure in the size overview indicates the recommended pressure on the lower end and the maximum pressure on the upper end.

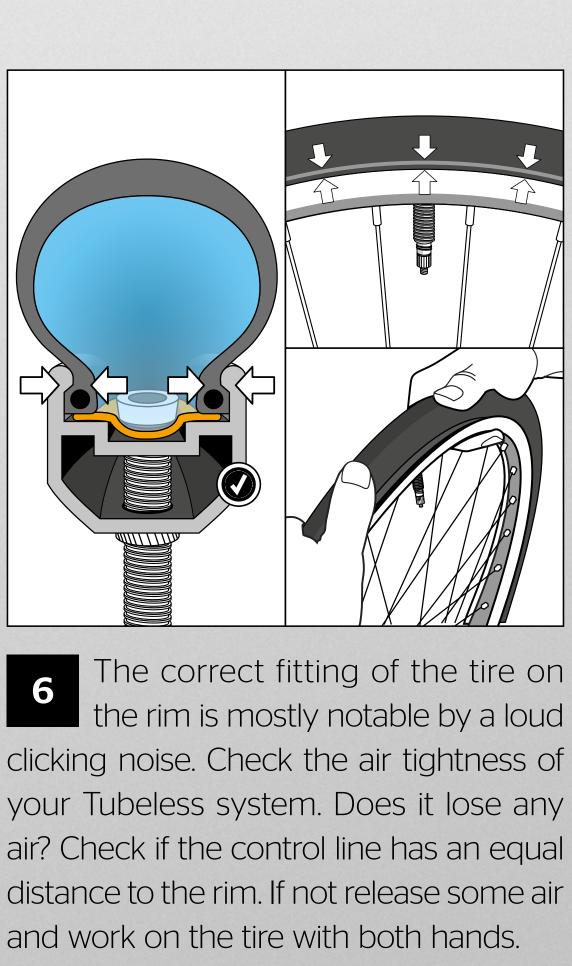

Support




INSTRUCTION 1-3

	_	٦
_		
-		
_		


INSTRUCTION 4-6

Г	٦
L	

INSTRUCTION 7-9

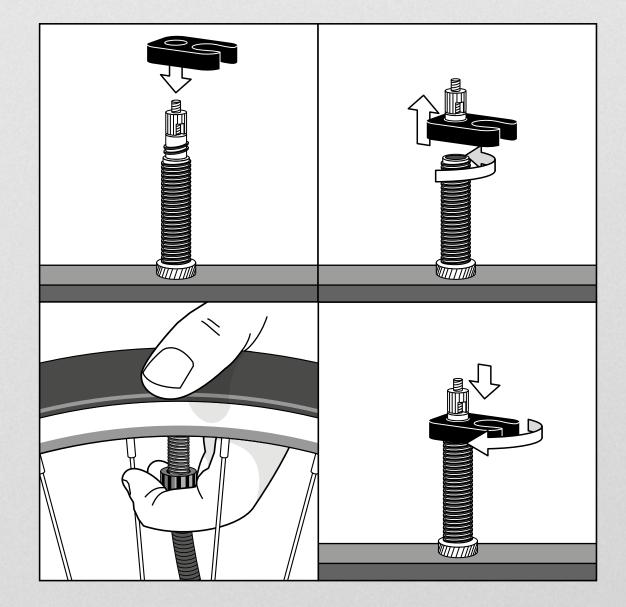


To enhance the air volume, unscrew 7 the valve core. Pump it up and screw the valve core in again.

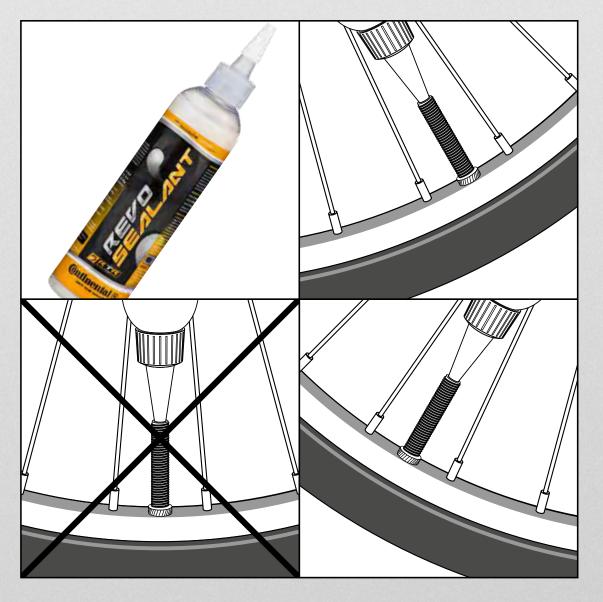

For the best puncture resistance, 8 we recommend to fill approximately 30 - 60 ml of tire sealant through the valve. Considering it will dry over time, it is best to check and refill it every 3 - 6 months.


Important:

Do not insert the tire sealant with the valve at a 6 o'clock position! The valve should be located at the 5 or 7 o'clock position.

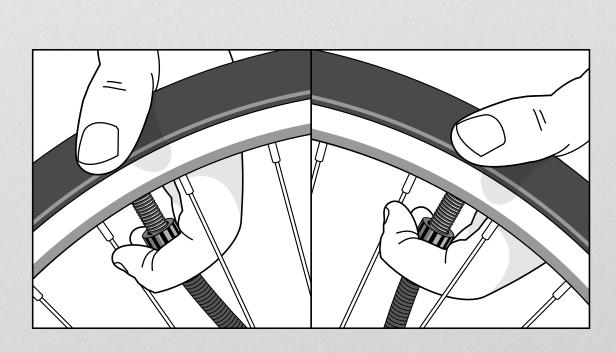

If you are using tire sealant: For in-9 flation place the tire with the valve at the 11 or 1 o'clock position. Otherwise sealant could leak into the valve or put too much turbulence into it. It could dry faster or lock up the valve core.

Please be advised that the use of a **CO2** cartridge can clump the sealant particles.










Continental Reifen Deutschland GmbH

Büttnerstraße 25 D-30165 Hannover

www.continental-tires.com/bicycle

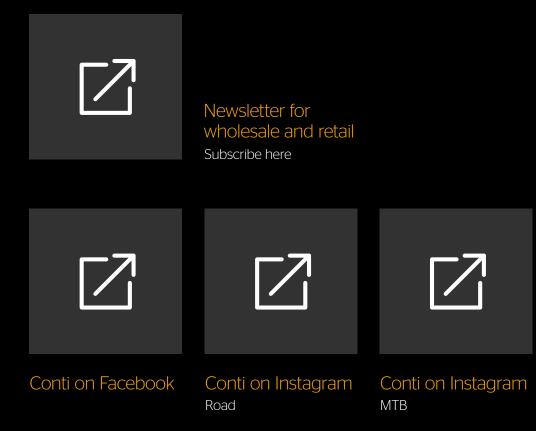

Subject to technical changes. No reliability for printer's error: 04/25 Barthelmay & Habedank Design GmbH.

Vectran™ is the registered trademark of Kuraray Co., Ltd.; Kevlar[®] is the registered trademark of E. I. du Pont de Nemours and Company.

© Copyright 2025 by Continental Reifen Deutschland GmbH,

30165 Hannover, Germany